



Control Transformer UL1585, Class 2

TCT40-09E07K

Description:

Triad control transformers come with tamper resistant shrouds for safety and a steel bracket welded to the bottom of the transformer for ease of mounting. This style comes with 18 AWG stranded leads which are 12 inches in length.

Electrical Specifications (@25C):

Maximum Power: 40VA
Input: 208V / 240V, 50/60 Hz
Output: 24V @ 1.67 Amps

Construction:

These transformers are designed with dual bobbin construction and insulated shrouds on the primary and secondary sides. Welded laminations have holes in each corner to allow direct mounting to a panel.

Safety:

Since these products are inherently energy limited, no secondary fusing is required. Triad Control Transformers are designed and manufactured to meet the following agency approvals:



Agency Files:

UL: File E65390, UL 1585, Class 2, Component
File E65390, Certified for Canada
CSA: File 226495

Dimensions: (all dimensions in inches)





Corner holes in laminations: 0.16
Spacing between corner holes: 2.19 (horizontal)
Spacing between corner holes: 1.75 (vertical)
All other dimensions: see drawing

Unit Pack Boxed Weight: 1.5 lbs

Lead Configuration/ Color:

208V	Primary: Black / Blue	Secondary:
240V	Black / Red	Yellow / Yellow

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

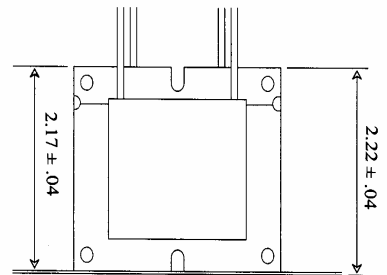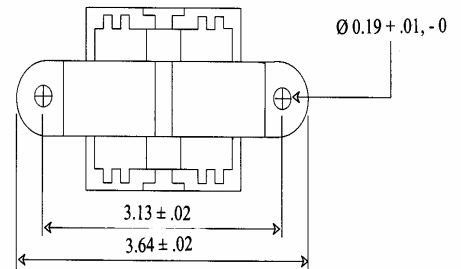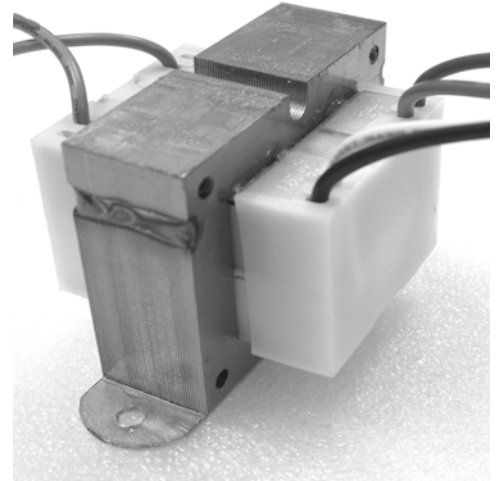

web: www.com.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

22520B Temescal Canyon Road
Corona, California
92883

Release Date: August 27, 2004
Revision: A