

VI TELEFILTER**Filter specification****TFS 211 B****1/5****Measurement condition**

Ambient temperature: 20 ... 25 °C
 Input power level: 5 ± 2 dBm
 terminating impedances
 Source: 1000 Ω || -6.8 pF
 Load: 670 Ω || -6.2 pF

Construction and pin connection

see page 2

Characteristics

Remark:

Reference level for the relative attenuation a_{rel} of the TFS 211 B is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_C is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The given values for the relative attenuation a_{rel} and for the group delay ripple have to be reached at the frequencies given below also if the centre frequency f_0 is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_0 .

D a t a		typ. value	limit
Insertion loss	$a_e = a_{min}$	6 dB dB	max. 8 dB
Center frequency	f_C	-	210,95 ... 211,05 MHz
Relative attenuation	a_{rel}		
$f_C - 100$ kHz ... $f_C + 100$ kHz		0,3...0,5 dB	max. 1 dB
$f_C - 400$ kHz ... $f_C + 400$ kHz			max. 3 dB
$f_C \pm 630$ kHz ... $f_C \pm 1,0$ MHz		-	min. 6 dB
$f_C \pm 1,0$ MHz ... $f_C \pm 2,0$ MHz		-	min. 10 dB
$f_C \pm 2,0$ MHz ... $f_C \pm 80$ MHz		-	min. 30 dB
$f_C + 80$ MHz ...	$2,0$ GHz	-	min. 40 dB
Group delay ripple GD			
$f_C - 100$ kHz ... $f_C + 100$ kHz	-	250ns	max. 350 ns
Input power level		-	max. + 10 dBm
Permissible DC voltage		-	max. 10 V
Operating temperature range			-10 °C ... + 85 °C
Storage temperature range			- 30 °C ... + 85 °C
Temperature coefficient	TC	- 0,036 ppm/K ² 1)	
Frequency inversion temperature	T_0	40 °C	-

Note 1) - Δf (Hz) = TC (ppm/K²) x (T - T₀)² x F_{T0} (MHz)**Generated:** _____**Checked / approved:** _____


VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtin.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Construction and pin connection

(All dimensions in mm)

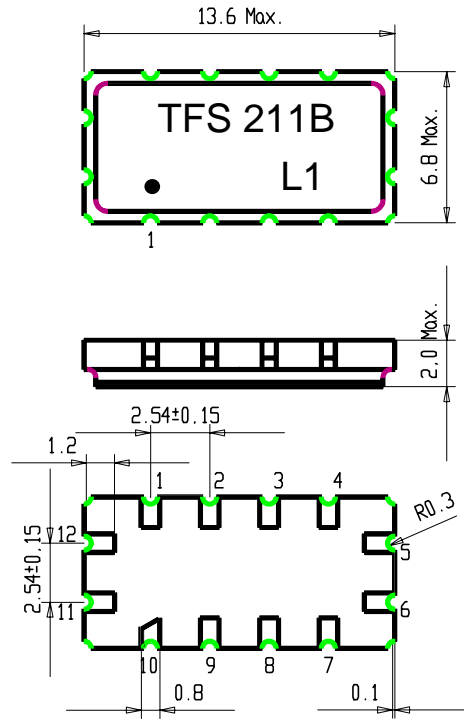


1	Ground
2	Ground
3	Ground
4	Ground
5	Output
6	Output RF Return
7	Ground
8	Ground
9	Ground
10	Ground
11	Input
12	Input RF Return

50 Ω test circuit1

The values of the matching elements which are given below are calculated from the source and load impedance. If the values of the matching elements are not equal to standard values the best standard values are given in brackets. If standard matching elements instead of the exact values are used it can not be guaranteed that the specification will be fulfilled.

Because these are theoretical values they have to be modified on PCB's corresponding to the existing parasitics.

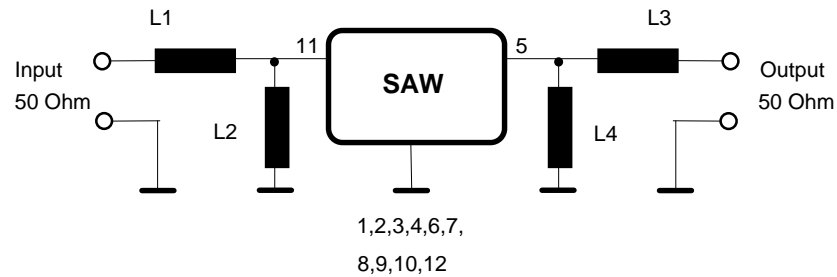


$$L1 = 150 \text{ nH}$$

$$L3 = 140 \text{ nH (150 nH)}$$

$$L2 = 220 \text{ nH}$$

$$L4 = 220 \text{ nH}$$

This circuit is used for all measurements at Telefilter.

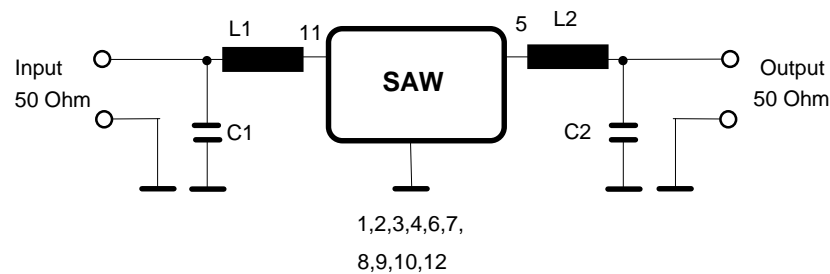50 Ω test circuit2

If this kind of matching circuit is used the filter will also fulfill the specification in passband. But in the stopband at $f_c + 80\text{MHz} \dots f_c + 2\text{GHz}$ the specification can't be fulfilled without using an additional lowpass. If no lowpass is used the typical attenuation in that area will be about 30 dB.

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

Chip-mount air reflow profile

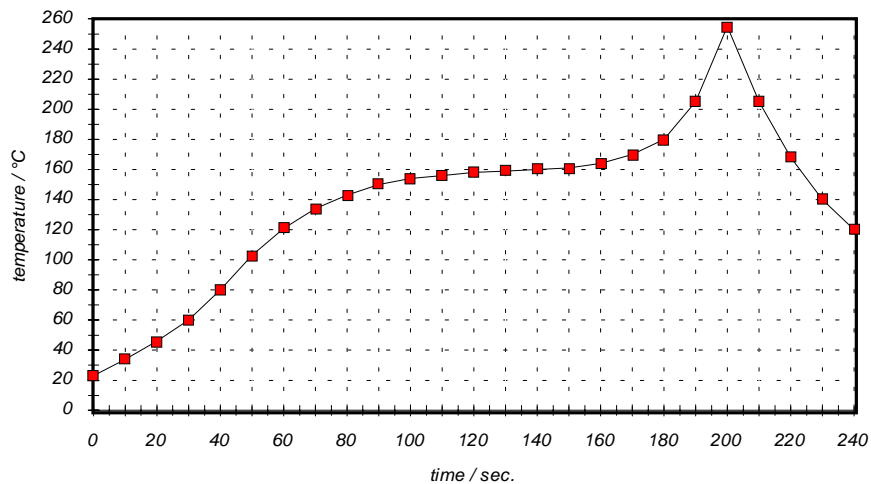


Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120