

## 30 AMP ULTRAFAST RECOVERY DIODES

### FEATURES

- Glass Passivated for high reliability/temperature performance
- Low switching noise
- Low forward voltage drop
- Low thermal resistance
- High switching capability
- High surge capability




### RoHS COMPLIANT

### MECHANICAL DATA

- Case: TO-247(TO-3P) molded epoxy (U/L Flammability Rating 94V-0)
- Terminals: Rectangular pins w/ standoff
- Solderability: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Diodes depicted on product
- Mounting Position: Any
- Weight: 0.2 Ounces (5.55 Grams)

### MECHANICAL SPECIFICATION

ACTUAL SIZE OF TO-247AB (TO-3PAB) PACKAGE

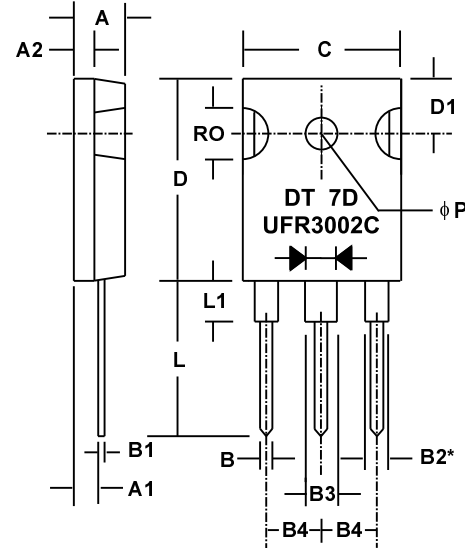

\*Applies to Pins 1 and 3

Sym	Minimum		Maximum	
	in	mm	in	mm
A	0.19	4.82	0.205	5.2
A1	0.087	2.21	0.102	2.6
A2	0.075	1.9	0.085	2.16
B	0.045	1.14	0.055	1.4
B1	0.022	0.56	0.032	0.81
B2	0.079	2.01	0.094	2.39
B3	0.116	2.95	0.126	3.2
B4			0.215	5.46
C	0.602	15.29	0.625	15.88
D	0.776	19.7	0.799	20.3
D1	0.209	5.31	0.224	5.69
L	0.559	14.2	0.582	14.8
L1	0.146	3.71	0.189	4.8
RO	0.209	5.3	0.224	5.7
P	0.13	3.3	0.145	3.7

### TO-247AB (TO-3PAB)

### SERIES UFR3001C - UFR3005C


### MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS					UNITS
		UFR 3001C	UFR 3002C	UFR 3003C	UFR 3004C	UFR 3005C	
Series Number							
Maximum DC Blocking Voltage	V <sub>RM</sub>	100	200	300	400	500	VOLTS
Maximum RMS Voltage	V <sub>RMS</sub>	70	140	210	280	350	
Maximum Peak Recurrent Reverse Voltage	V <sub>RRM</sub>	100	200	300	400	500	
Average Forward Rectified Current @ T <sub>c</sub> = 100 °C	I <sub>O</sub>	30					AMPS
Peak Forward Surge Current ( 8.3mS single half sine wave superimposed on rated load)	I <sub>FSM</sub>	250		200			
Maximum Forward Voltage (per diode) at 15 Amps DC	V <sub>FM</sub>	1.0		1.25			VOLTS
Maximum Average DC Reverse Current @ T <sub>c</sub> = 25 °C At Rated DC Blocking Voltage @ T <sub>c</sub> = 100 °C	I <sub>RM</sub>	10			500		μA
Typical Thermal Resistance, Junction to Case	R <sub>θJC</sub>	2					°C/W
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	150					pF
Maximum Reverse Recovery Time (I <sub>F</sub> =15.0A, di/dt=50A/μS, T <sub>J</sub> =25°C)	T <sub>RR</sub>	50		60			nSec
Junction Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150					°C

NOTES: (1) Measured at 1 MHz and an applied reverse voltage of 4 volts.

4.978ed110



## 30 AMP ULTRAFAST RECOVERY DIODES

### RATING & CHARACTERISTIC CURVES FOR SERIES UFR3001C - UFR3005C

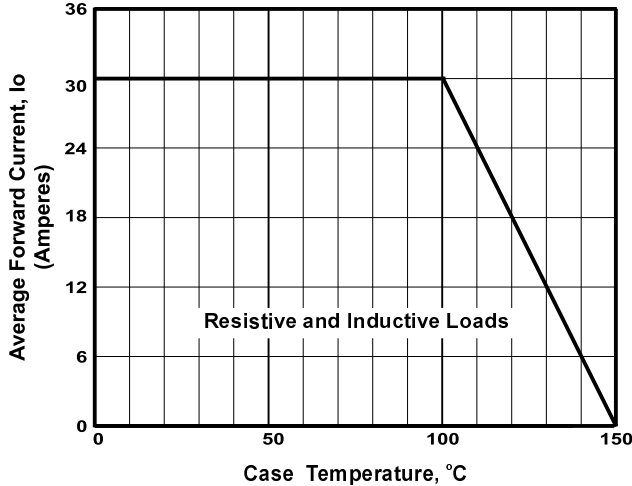


FIGURE 1. FORWARD CURRENT DERATING CURVE

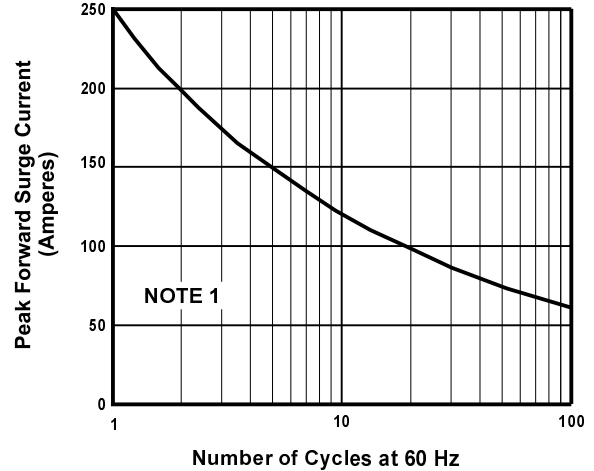


FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT

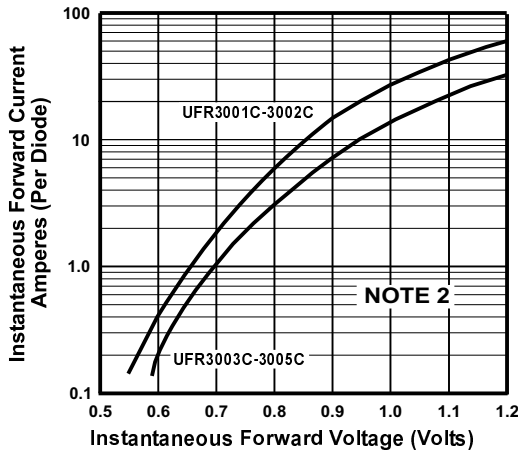


FIGURE 3. TYPICAL FORWARD CHARACTERISTICS

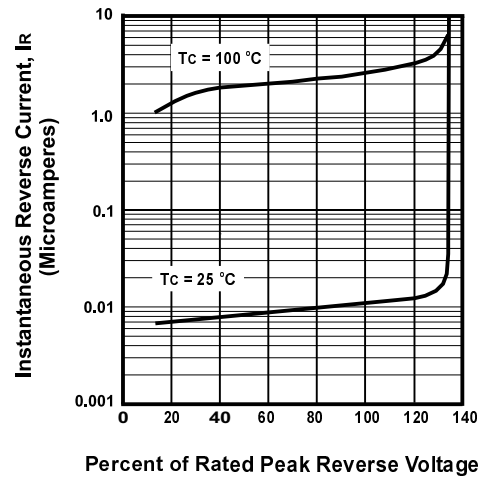


FIGURE 4. TYPICAL REVERSE CHARACTERISTICS

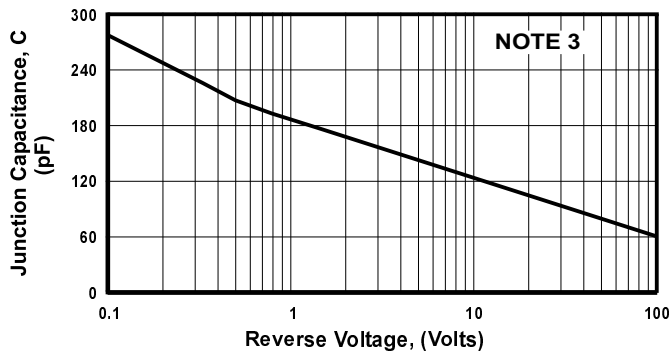


FIGURE 5. TYPICAL JUNCTION CAPACITANCE

#### NOTES

- (1) JEDEC Method, 8.3 mSec. Single Half Sine Wave
- (2)  $T_J = 25^\circ\text{C}$ , Pulse Width = 300  $\mu\text{Sec}$ , 2.0% Duty Cycle
- (3)  $T_C = 25^\circ\text{C}$ ,  $f = 1\text{ MHz}$ ,  $V_{SIG} = 50\text{ mV P-P}$