





1.5 Amp Glass Passivated Sintered Ultra - Fast Rectifiers

Description

UGPZ15A . . . 15G Series

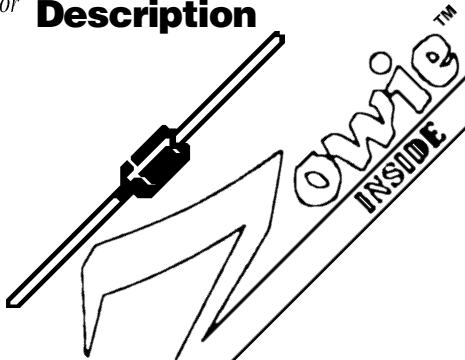

Mechanical Dimensions

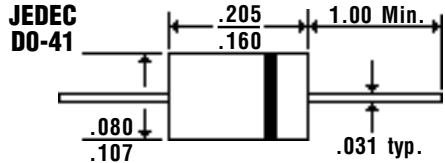

Features

- **LOWEST COST FOR GLASS SINTERED ULTRA - FAST CONSTRUCTION**
- **LOWEST V_F FOR GLASS SINTERED ULTRA - FAST CONSTRUCTION**
- **TYPICAL $I_R < 100$ nAmps**
- **1.5 AMP OPERATION @ $T_A = 55^\circ\text{C}$, WITH NO THERMAL RUNAWAY**
- **SINTERED GLASS CAVITY-FREE JUNCTION**

Electrical Characteristics @ 25°C.	UGPZ15A . . . 15G Series				Units
Maximum Ratings	15A	15B	15D	15G	
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	200	400	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	280	Volts
DC Blocking Voltage... V_{DC}	50	100	200	400	Volts
Average Forward Rectified Current... $I_{F(av)}$ Current 3/8" Lead Length @ $T_A = 55^\circ\text{C}$	1.5				Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} 8.3mS, 1/2 Sine Wave Superimposed on Rated Load	50				Amps
Forward Voltage @ Rated Forward Current and 25°C... V_F	< 0.95 >			1.25	Volts
Full Load Reverse Current... $I_R(av)$ Full Cycle Average @ $T_A = 55^\circ\text{C}$	100				μAmps
DC Reverse Current... $I_{R(max)}$ @ Rated DC Blocking Voltage	$T_A = 25^\circ\text{C}$	5.0			μAmps
	$T_A = 150^\circ\text{C}$	200			μAmps
Typical Junction Capacitance... C_J (Note 1)	25				pF
Maximum Thermal Resistance... $R_{\theta JA}$ (Note 2)	30				°C/W
Maximum Reverse Recovery Time... t_{RR} (Note 3)	35				nS
Operating & Storage Temperature Range... T_J, T_{STRG}	-65 to 175				°C

- NOTES:**
1. Measured @ 1 MHz and applied reverse voltage of 4.0V.
 2. Thermal Resistance from Junction to Ambient at 3/8" Lead Length, P.C. Board Mounted.
 3. Reverse Recovery Condition $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$.