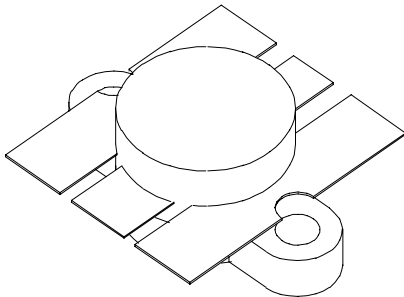


UMIL 100

100 Watts, 28 Volts, Class AB
Defcom 225 - 400 MHz

<p>GENERAL DESCRIPTION</p> <p>The UMIL100 is a double input matched COMMON EMITTER broadband transistor specifically intended for use in the 225-400 MHz frequency band. It may be operated in Class AB or C. Gold metallization and silicon diffused resistors ensure ruggedness and high reliability.</p>	<p>CASE OUTLINE 55HV, Style 2</p> 
<p>ABSOLUTE MAXIMUM RATINGS</p> <p>Maximum Power Dissipation @ 25°C 250 Watts</p> <p>Maximum Voltage and Current</p> <p>BVces Collector to Emitter Voltage 60 Volts BVebo Emitter to Base Voltage 4.0 Volts Ic Collector Current 12.0 A</p> <p>Maximum Temperatures</p> <p>Storage Temperature - 65 to +150°C Operating Junction Temperature +150°C</p>	

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Output	F = 400 MHz	100			Watts
Pin	Power Input	Vcc = 28 Volts			19	Watts
Pg	Power Gain		7.2	8.5		dB
ηc	Efficiency			55		%
VSWR	Load Mismatch Tolerance				5:1	


BVebo	Emitter to Base Breakdown	Ie = 5 mA	4.0			Volts
BVces	Collector to Emitter Breakdown	Ic = 100 mA	60			Volts
BVceo	Collector to Emitter Breakdown	Ie = 50 mA	31			Volts
BVcbo	Collector to Base Breakdown	Ic = 100 mA	60			Volts
Icbo	Collector to Base Current	Vc = 30 Volts			50	mA
Cob	Output Capacitance	Vcb = 28 V, F = 1 MHz		120		pF
hFE	DC - Current Gain	Vce = 5 V, Ic = 1 A	10			
θjc	Thermal Resistance				0.7	°C/W

Issue October 1998: Correction on Case from HU to HV

GHZ TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHZ RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.


POWER GAIN VS FREQUENCY

Pout = 100 Watt, Vcc = 28 Volts

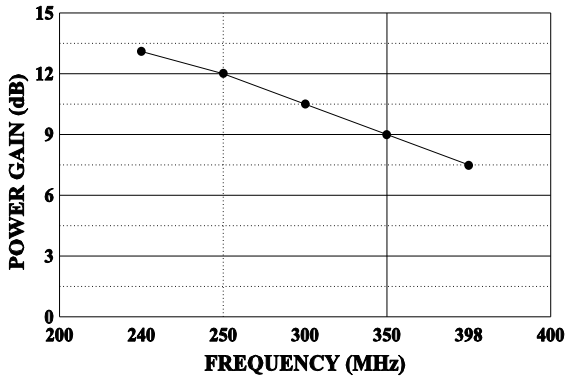


POWER OUTPUT vs POWER INPUT

Vcc = 28V f = 400MHz

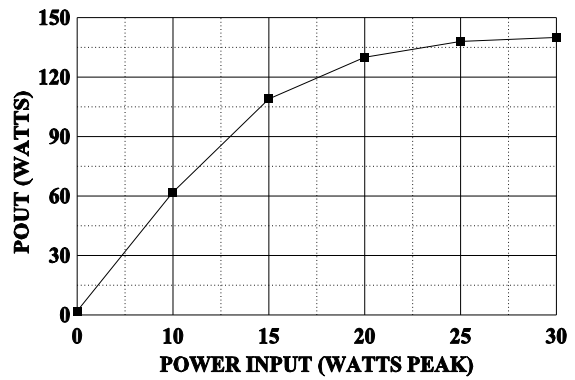


DC SAFE OPERATING AREA

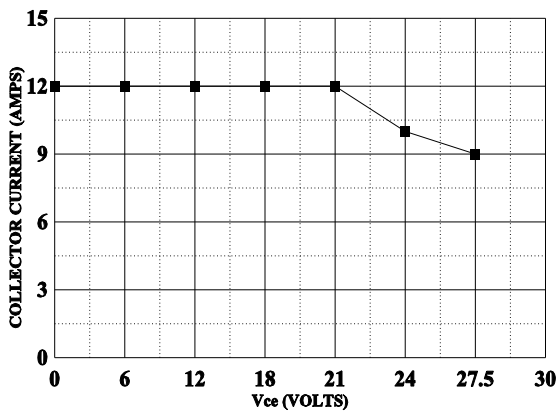


SMITH CHART UMIL100

NORMALIZED IMPEDANCE AND ADMITTANCE COORDINATES

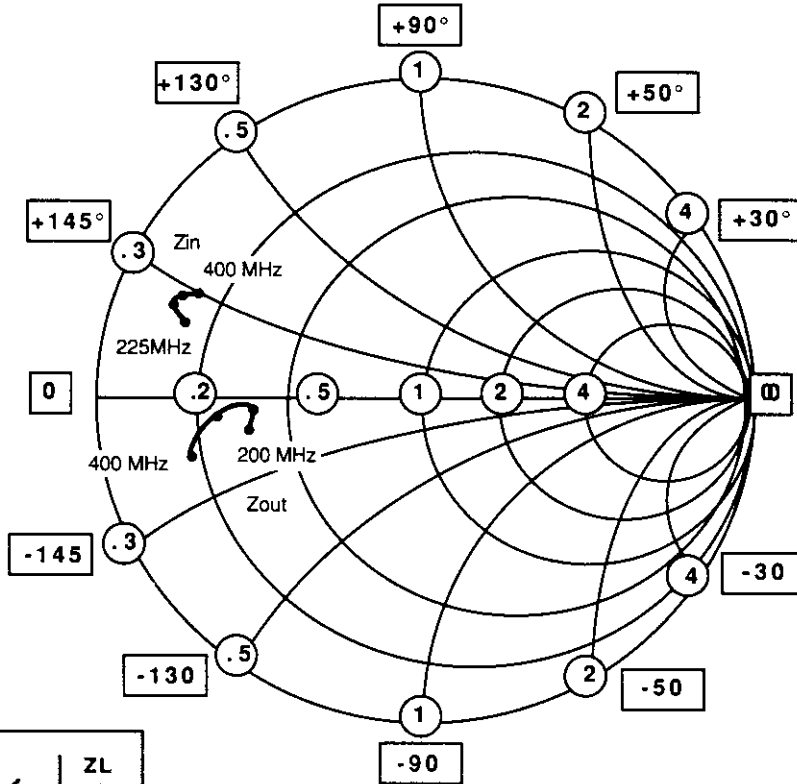

NORMALIZED TO A 10 OHM SYSTEM

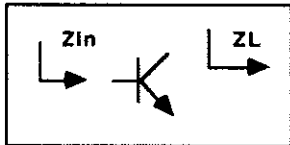

FREQUENCY MHz	R	Z _{in} JX	FREQUENCY MHz	R	Z _{load} JX
225	1.7	+ j2.2	225	3.5	- j1.5
300	1.2	+ j2.4	300	3.8	- j0.9
350	1.3	+ j2.6	350	2.7	- j1.0
400	1.5	+ j2.8	400	1.8	- j2.0