


Controlled Avalanche Bridge Rectifiers VJ247M — VJ847M

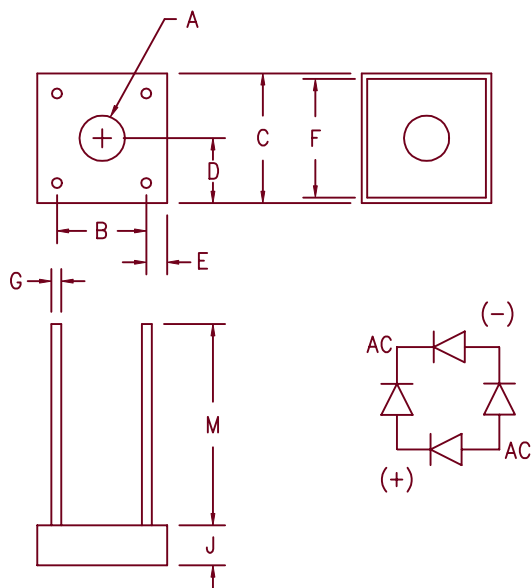

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.137	.167	3.84	2.21	Dia.
B	.411	.441	10.44	11.20	
C	.600	.620	---	---	
D	.295	.310	---	---	
E	.076	.096	---	---	
F	.545	.555	13.85	14.10	
G	.076	.096	.970	1.07	
H	1.0 Min.		25.40 Min.		
J	.195	.215	4.95	5.46	

Microsemi Catalog Number

VJ247M
VJ447M
VJ647M
VJ847M

Avalanche Voltage Range

250V – 700V
450V – 900V
660V – 1100V
850V – 1300V

- 10 Amps DC Output
- 100 Amp Surge Current
- 2000V Isolation
- Glass Passivated Die

Electrical Characteristics

DC Current Output
Maximum surge current
Max. I^2t for fusing
Max. peak forward voltage per leg
Max. peak reverse current per leg

I_o 10 Amps
 I_{FSM} 100 Amps
 I^2t 41 A²s
 V_{FM} 1.3 Volts
 I_{RM} 5 μ A

$T_C = 80^\circ\text{C}$
8.3ms, half sine
 $I_{FM} = 1.0A; T_J = 25^\circ\text{C}^*$
 $V_{RRM, T_J} = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range
Operating junction temp range
Maximum thermal resistance
Mounting torque
Weight

T_{STG}
 T_J
 $R_{\theta JC}$

-55°C to 175°C
 -55°C to 150°C
3 $^\circ\text{C}/\text{W}$ Junction to case
12–15 inch pounds (#6 screw)
.14 ounces (4.5 grams) typical

6–5–01 Rev. IR

VJ247M — VJ847M

Figure 1
Typical Forward Characteristics — Per Leg

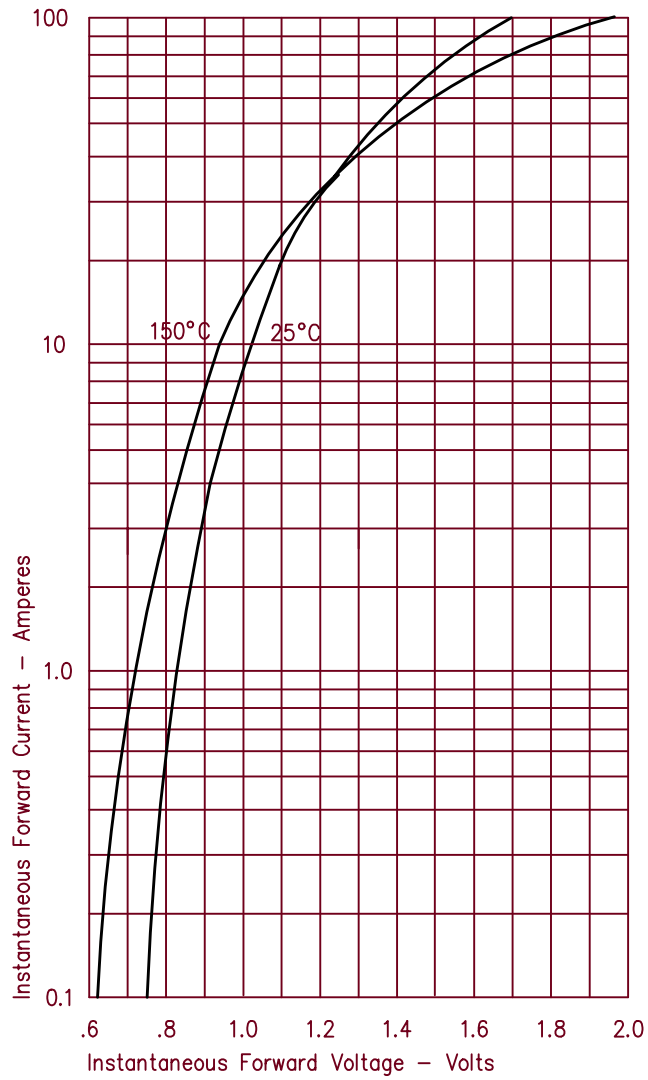


Figure 2
Forward Current Derating — Per Leg

