

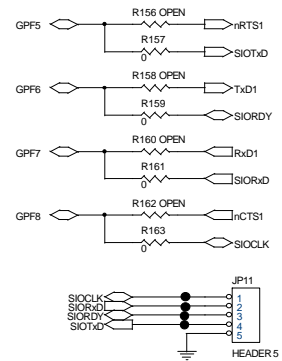


A

In 32-bit data mode be supported below,
 -UART2 channel with RTS/CTS
 -or UART0's Rx/D/TxD with RTS/CTS & SIO

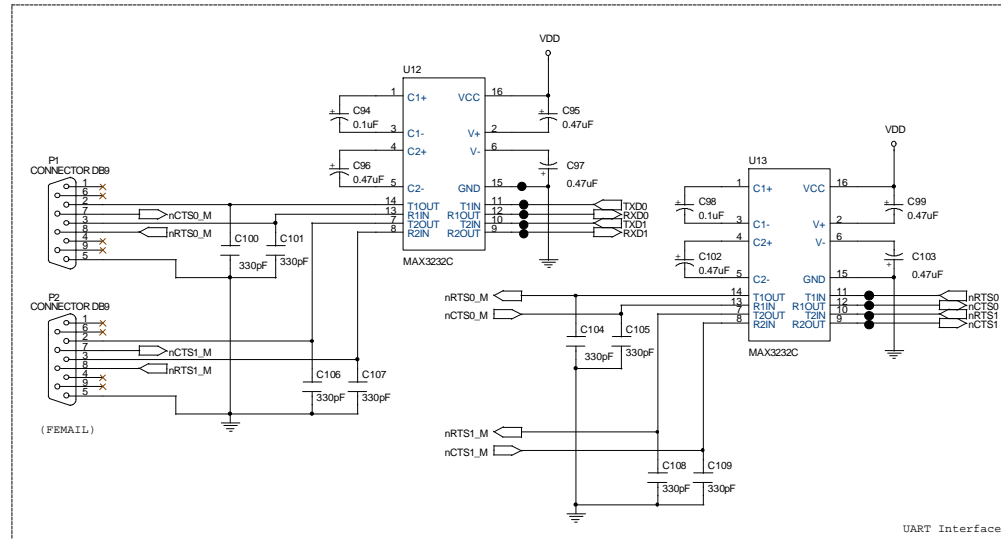

In 32-bit mode , UART0 Handshake



Title		
S3C44BOX DEMO BOARD		
Size	Document Number	Rev
C	UART/SIO/S	0.0
Date: Thursday, August 24, 2000 Sheet 4 of 6		

A