


147 Central Avenue  
 Hackensack, New Jersey 07601  
 Tel: 201-489-8989 • Fax: 201-489-6911




**CHICAGO MINIATURE LAMP, INC.**  
 WHERE INNOVATION COMES TO LIGHT

### T-3 1/4 Miniature Bayonet Base

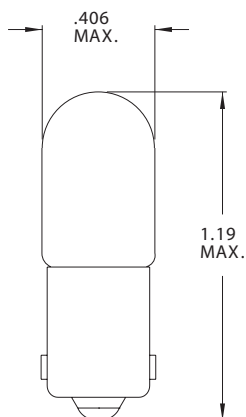

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1826      | 18.0           | .15  | 1.8  | 250        | C-2V          |
| CM1437      | 24.0           | .06  | .90  | 20         | C-2F          |
| CM1818      | 24.0           | .17  | 3.3  | 250        | C-2V          |
| CM313       | 28.0           | .17  | 3.5  | 500        | C-2F          |
| CM757       | 28.0           | .08  | .62  | 7,500      | C-2F          |
| CM1819      | 28.0           | .04  | .34  | 2,500      | C-2F          |
| CM1820      | 28.0           | .10  | 1.6  | 1,000      | C-2F          |
| CM1829      | 28.0           | .07  | 1.0  | 1,000      | C-2F          |
| CM1843      | 28.0           | .02  | .20  | 3,000      | C-2F          |
| CM1864      | 28.0           | .17  | 3.0  | 1,500      | C-2F          |
| CM1873      | 28.0           | .20  | 3.0  | 7,000      | C-2F          |
| CM1822      | 36.0           | .10  | 2.1  | 1,000      | C-2F          |
| CM1828      | 37.5           | .05  | .65  | 3,000      | C-2F          |
| CM1835      | 55.0           | .05  | 1.1  | 5,000      | C-5           |
| CM8-3995    | 130.0          | .02  | .20  | 2,000      | C-5           |
| CM949       | 130.0          | .022 | .40  | 2,000      | 2CC-2F        |

### T-3 1/4 Miniature Screw Base

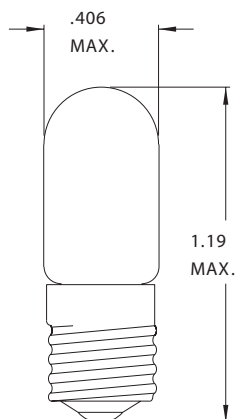

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1800      | 1.35           | .06  | .07  | 500        | S-2           |
| CM48        | 2.00           | .06  | .04  | 1000       | S-2           |
| CM41        | 2.50           | .50  | .50  | 3000       | C-2R          |
| CM42        | 3.20           | .35  | .50  | 3000       | C-2R          |
| CM40        | 6.30           | .15  | .50  | 3000       | C-2R          |
| CM46        | 6.30           | .25  | .90  | 3000       | C-2R          |
| CM1481      | 14.0           | .15  | 1.5  | 200        | C-2V          |
| CM1487      | 14.0           | .20  | 1.4  | 3000       | C-2V          |
| CM1821      | 28.0           | .17  | 3.4  | 500        | C-2F          |
| CM1832      | 37.5           | .05  | .65  | 3000       | C-2F          |
| CM1823      | 48.0           | .10  | 3.2  | 1000       | C-2F          |
| CM750       | 55.0           | .05  | .72  | 7500       | C-13          |
| CM8-3994    | 130.0          | .02  | .20  | 2000       | C-5           |

Chicago Miniature Lamp reserves the right to make specification revisions that enhance the design and/or performance of the product