


# MEMORY SPECTRUM



[www.infineon.com/memory](http://www.infineon.com/memory)  
[www.infineon.com/memory/flash](http://www.infineon.com/memory/flash)

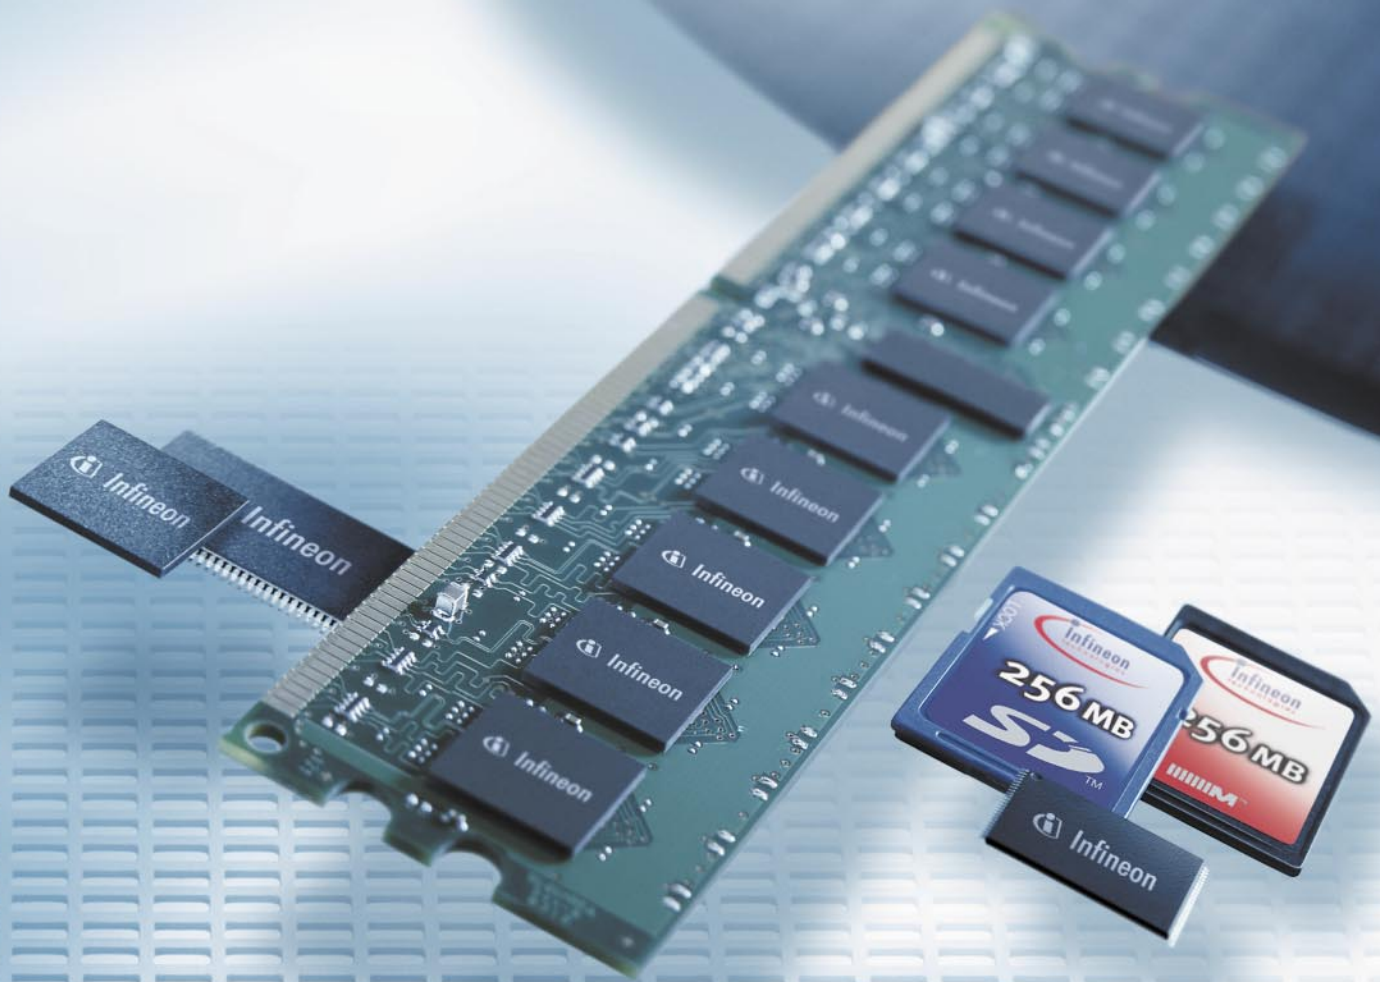

Never stop thinking.

# Introduction

APRIL 2004. This edition of Memory Spectrum has been developed to enable you to easily view the entire range of Infineon's memory products. For more related product information and the latest datasheets, please visit our websites: [www.infineon.com/memory](http://www.infineon.com/memory) and [www.infineon.com/memory/flash](http://www.infineon.com/memory/flash).

## Technology and Trends

As a leading memory products supplier, Infineon continues to expand its portfolio with the recent introduction of:

- DDR400 Components and DIMMs (PC3200)
- 2 GB DDR2 Unbuffered DIMM
- 4 GB DDR2 Registered DIMM
- 16 Mb and 32 Mb CellularRAM
- 512 Mb Mobile-RAM
- "Green\*\*\*", DRAM Components and Modules
- 512 Mb and 1 Gb TwinNAND Components
- SD Cards/MultiMediaCards

\*\* Lead & Halogen-Free

## DRAM Components

Double Data Rate (DDR/DDR2) and Single Data Rate (SDR). Synchronous Dynamic Random Access Memory.

	16 Mb	32 Mb	128 Mb	256 Mb	512 Mb	1 Gb
DDR DRAMs			+	+	+	
DDR2 DRAMs				+	+	+
SDR DRAMs			+	+	+	
Reduced Latency (RLDRAM™)				+		
Graphics RAM			+	+		
Mobile-RAM			+	+	+	
CellularRAM™	+	+				

## DRAM Modules

Double Data Rate (DDR/DDR2), Dual Inline Memory Modules (DIMMs).

	64 MB	128 MB	256 MB	512 MB	1 GB	2 GB	4 GB
Unbuffered DDR		+	+	+	+		
Registered DDR		+	+	+	+		
Registered DDR Reduced Height		+	+	+	+	+	
SO-DIMM DDR		+	+	+	+		
Unbuffered DDR2			+	+	+	+	
Registered DDR2			+	+	+	+	+
SO-DIMM DDR2			+	+	+	+	

Single Data Rate (SDR), Dual Inline Memory Modules (DIMMs).

	64 MB	128 MB	256 MB	512 MB	1 GB	2 GB	4 GB
Unbuffered SDR		+	+	+			
Registered SDR		+	+	+	+		
SO-DIMM SDR		+	+	+			

## Flash Components

Thin Small Outline Package (TSOP).

	64 Mb	128 Mb	256 Mb	512 Mb	1 Gb	2 Gb	4 Gb
TwinFlash™				+	+		

## Flash Cards

MultiMediaCards and SD Cards.

	64 MB	128 MB	256 MB	512 MB	1 GB	2 GB	4 GB
MultiMediaCards	+	+	+				
SD Cards	+	+	+				

RLDRAM™ and CellularRAM™ are registered trademarks of Infineon Technologies AG. TwinFlash™ is a trademark of Infineon Technologies AG, based on Saifun NROM technology.

# Content

<b>DRAM Components</b>	4 – 8
DDR Components	5 – 6
DDR2 Components	7
SDR Components	8
<b>DRAM Modules</b>	9 – 20
DDR Modules	10 – 14
DDR2 Modules	15 – 17
SDR Modules	18 – 20
<b>Specialty DRAMs</b>	21 – 24
<b>Flash</b>	25 – 26



# DRAM Components


## Nomenclature DRAM Components

HYB 25 D 128 80 o C T -6 (Example)

DRAM Modules

Specialty DRAMs

Flash

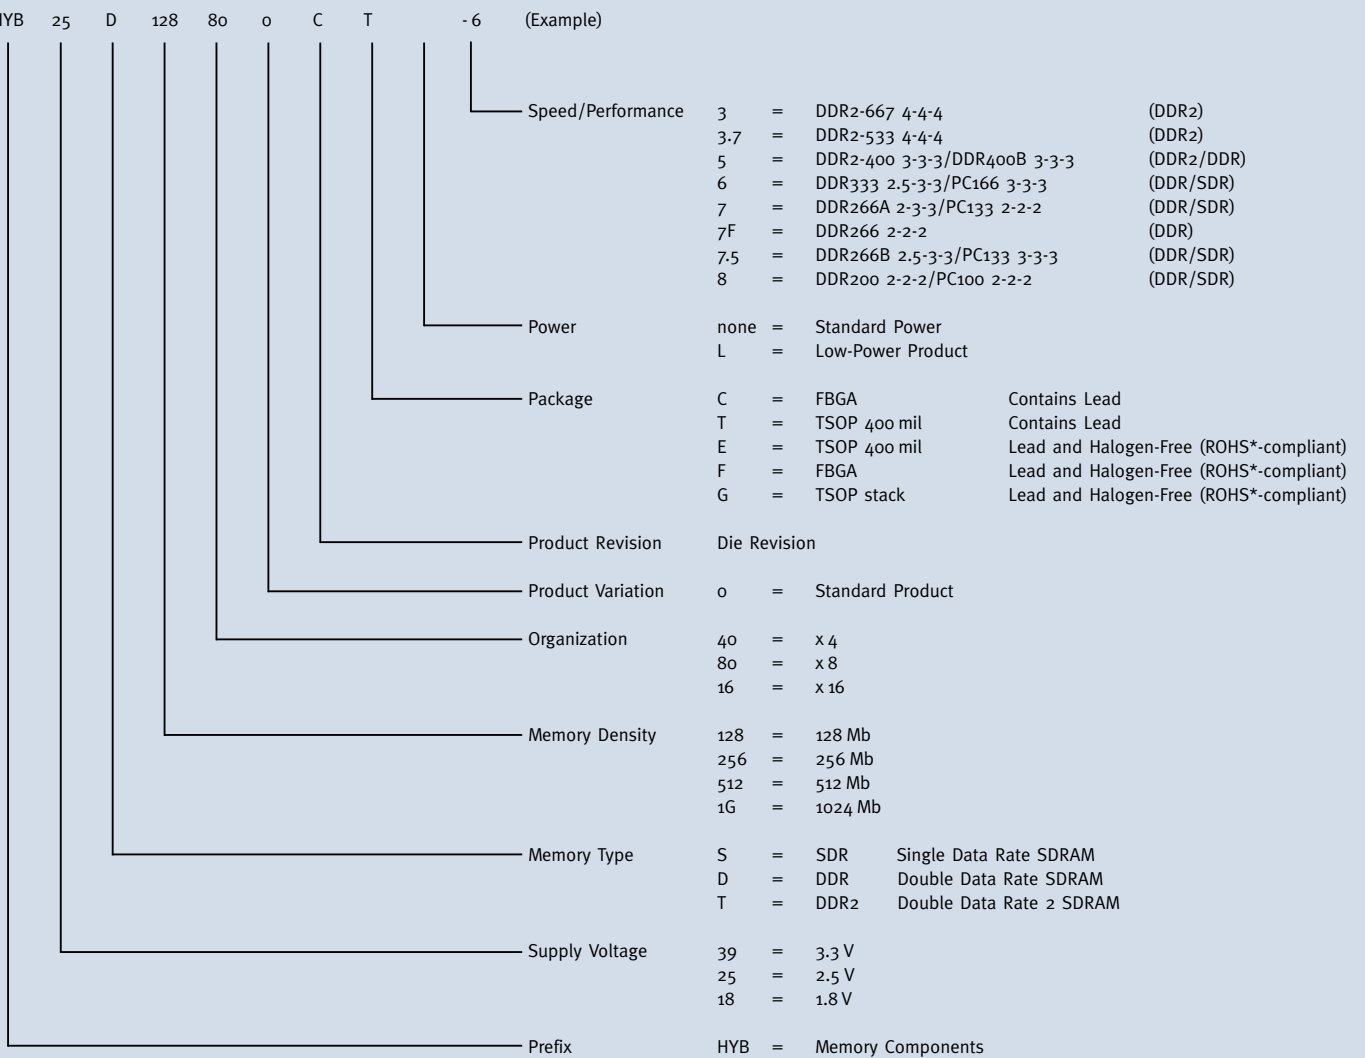

\*ROHS = Restriction Of Hazardous Substances



## DDR Components

Generation	Organization	Package	Speed	Latency	Sales Description	Speed No.	Ordering Code	Prod.	Green
<b>128 Mb</b>	32 M x 4	TSOP-66 (400 mil)	DDR266A	2-3-3	HYB25D128400AT-	7	Q67100 Q4309	Now	
			DDR333	2.5-3-3	HYB25D128400CE-	6	Q67100 Q1455	2Q04	XX
	16 M x 8	TSOP-66 (400 mil)	DDR266A	2-3-3	HYB25D128800AT-	7	Q67100 Q4311	Now	
			DDR333	2.5-3-3	HYB25D128800CE-	6	Q67100 Q1459	2Q04	XX
	8 M x 16	TSOP-66 (400 mil)	DDR266A	2-3-3	HYB25D128160AT-	7	Q67100 Q4313	Now	
			DDR333	2.5-3-3		6	Q67100 Q5044		
DDR333			2.5-3-3	HYB25D128160CE-	6	Q67100 Q1458	2Q04	XX	
<b>256 Mb</b>	64 M x 4	TSOP-66 (400 mil)	DDR266A	2-3-3	HYB25D256400BT-	7	Q67100 Q4587	Now	
			DDR266	2-2-2		7F	Q67100 Q4880		
			DDR266A	2-3-3	HYB25D256400CE-	7	Q67100 Q5049	Now	XX
	32 M x 8	TSOP-66 (400 mil)	DDR333	2.5-3-3	HYB25D256800BT-	6	Q67100 Q4589	Now	
			DDR400	3-3-3		5	Q67100 Q4275		
			DDR333	2.5-3-3	HYB25D256800CE-	6	Q67100 Q5051	Now	XX
			DDR333	2.5-3-3	HYB25D256800CEL-	6	Q67100 Q1753	Now	XX
	16 M x 16	TSOP-66 (400 mil)	DDR400	3-3-3	HYB25D256800CE-	5	Q67100 Q5180	Now	XX
			DDR266A	2-3-3	HYB25D256160BT-	7	Q67100 Q4593	Now	
			DDR333	2.5-3-3		6	Q67100 Q4592		
DDR400			3-3-3	5		Q67100 Q4277			
DDR333			2.5-3-3	HYB25D256160CE-	6	Q67100 Q5045	Now	XX	
DDR400	3-3-3	5	Q67100 Q5182	Now	XX				
<b>256 Mb FBGA</b>	64 M x 4	FBGA 6o (8 x 12 mm)	DDR266A	2-3-3	HYB25D256400BC-	7	Q67100 Q4615	Now	
			DDR333	2.5-3-3		6	Q67100 Q4614		
			DDR400	3-3-3		5	Q67100 Q1071		
			DDR333	2.5-3-3	HYB25D256400CC-	6	Q67100 Q4764	2Q04	
			DDR400	3-3-3		5	Q67100 Q1418		
	32 M x 8	FBGA 6o (8 x 12 mm)	DDR266A	2-3-3	HYB25D256800BC-	7	Q67100 Q4596	Now	
			DDR333	2.5-3-3		6	Q67100 Q4595		
			DDR333	2.5-3-3	HYB25D256800CF-	6	Q67100 Q4443	2Q04	XX
			DDR333	2.5-3-3	HYB25D256800CC-	6	Q67100 Q4767	2Q04	
	DDR400	3-3-3	5	Q67100 Q1419					
	16 M x 16	FBGA 6o (8 x 12 mm)	DDR266A	2-3-3	HYB25D256160BC-	7	Q67100 Q4599	Now	
			DDR333	2.5-3-3		6	Q67100 Q4598		
DDR333			2.5-3-3	HYB25D256160CC-	6	Q67100 Q4770	2Q04		


XX = Lead and Halogen-Free



## DDR Components


Generation	Organization	Package	Speed	Latency	Sales Description	Speed No.	Ordering Code		Prod.	Green	
512 Mb	128 M x 4	TSOP-66 (400 mil)	DDR266A	2-3-3	HYB25D512400AT-	7	Q67100	Q4413	Now		
					HYB25D512400BE-	7	Q67100	Q5202	Now	XX	
	256 M x 4	TSOP stack (400 mil)	DDR266A	2-3-3	HYB25D1G400BG-		7	On request			
					64 M x 8	TSOP-66 (400 mil)	DDR266A	2-3-3	HYB25D512800AT-	7	Q67100
	DDR333	2.5-3-3		6					Q67100	Q4415	
	DDR333	2.5-3-3	HYB25D512800BE-	6			Q67100	Q5205	Now	XX	
				DDR400			3-3-3		5	Q67100	Q5204
	32 M x 16	TSOP-66 (400 mil)	DDR266A	2-3-3	HYB25D512160AT-	7	Q67100	Q4411	Now		
					DDR333	2.5-3-3	HYB25D512160AT-	6	Q67100	Q4416	Now
			DDR333	2.5-3-3	HYB25D512160BE-	6	Q67100	Q5209	Now	XX	
						DDR400	3-3-3		5	Q67100	Q5208
	512 Mb FBGA	128 M x 4	FBGA 60 (10 x 12 mm)	DDR333	2.5-3-3	HYB25D512400BC-	6	Q67100	Q1661	Now	
				DDR400	3-3-3		5	Q67100	Q1693		
		64 M x 8	FBGA 60 (10 x 12 mm)	DDR333	2.5-3-3	HYB25D512800BC-	6	Q67100	Q1663	Now	
DDR333				2.5-3-3	HYB25D512800BF-	6	Q67100	Q5215	Now	XX	
DDR400				3-3-3	HYB25D512800BC-	5	Q67100	Q1451	Now		
DDR400				3-3-3	HYB25D512800BF-	5	Q67100	Q1452	Now	XX	
32 M x 16		FBGA 60 (10 x 12 mm)	DDR333	2.5-3-3	HYB25D512160BC-	6	Q67100	Q1453	Now		
			DDR400	3-3-3		5	Q67100	Q1454			

XX = Lead and Halogen-Free

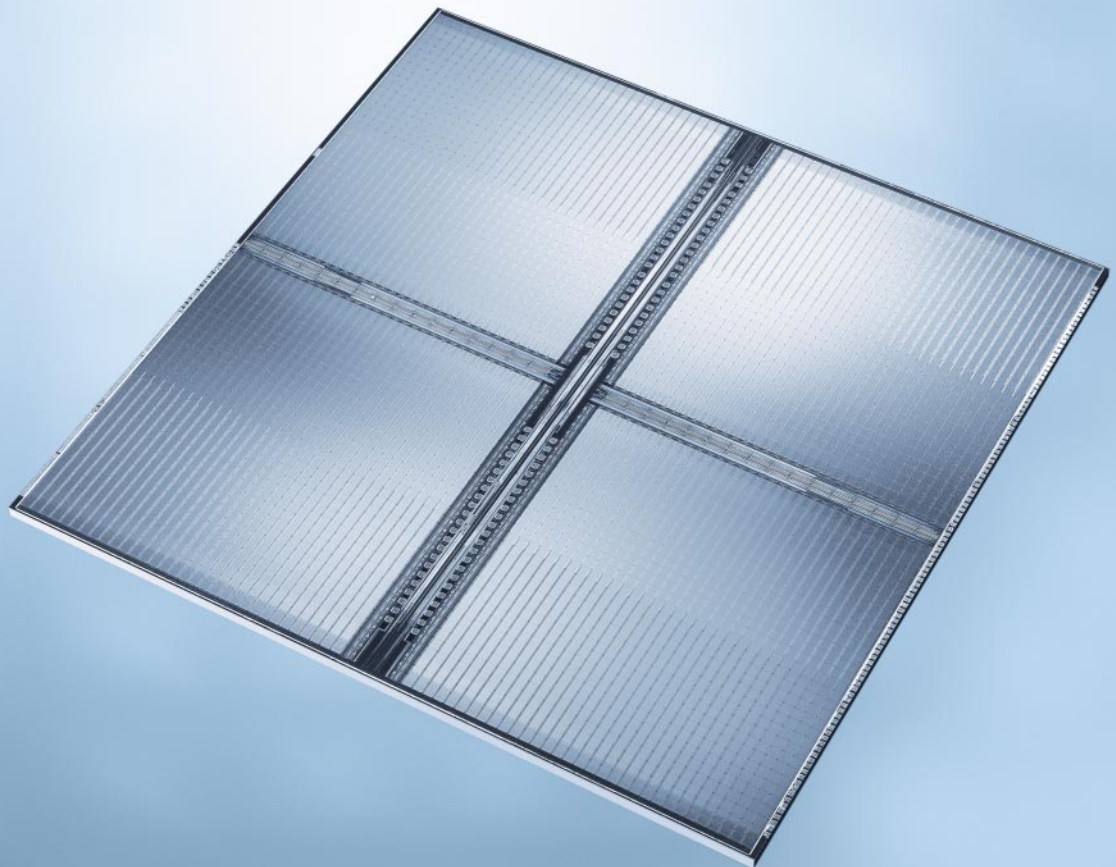

## DDR2 Components

Generation	Organization	Package	Speed	Latency	Sales Description	Speed No.	Ordering Code	Production	Green
<b>256 Mb</b>	64 M x 4	PTFBGA-60	DDR2 400	3-3-3	HYB18T256400AC-	5	Q67100 Q1314	3Q04	
			DDR2 533	4-4-4		3-7	Q67100 Q1311		
	32 M x 8	PTFBGA-60	DDR2 400	3-3-3	HYB18T256800AC-	5	Q67100 Q1322		
			DDR2 533	4-4-4		3-7	Q67100 Q1320		
	16 M x 16	PTFBGA-84	DDR2 400	3-3-3	HYB18T256160AC-	5	Q67100 Q1301		
			DDR2 533	4-4-4		3-7	Q67100 Q1293		
<b>512 Mb</b>	128 M x 4	PTFBGA-60	DDR2 400	3-3-3	HYB18T512400AC-	5	Q67100 Q1350	2Q04	
			DDR2 533	4-4-4		3-7	Q67100 Q1349		
	64 M x 8	PTFBGA-60	DDR2 400	3-3-3	HYB18T512800AC-	5	Q67100 Q1354		
			DDR2 533	4-4-4		3-7	Q67100 Q1352		
	32 M x 16	PTFBGA-84	DDR2 400	3-3-3	HYB18T512160AC-	5	Q67100 Q1347		
			DDR2 533	4-4-4		3-7	Q67100 Q1346		
<b>1 Gb</b>	256 M x 4	PTFBGA-68	DDR2 400	3-3-3	HYB18T1G400AC-	5	Q67100 Q1619	3Q04	
			DDR2 533	4-4-4		3-7	Q67100 Q1618		
	128 M x 8	PTFBGA-68	DDR2 400	3-3-3	HYB18T1G800AC-	5	Q67100 Q1622		
			DDR2 533	4-4-4		3-7	Q67100 Q1621		
	64 M x 16	PTFBGA-92	DDR2 400	3-3-3	HYB18T1G160AC-	5	Q67100 Q1625		
			DDR2 533	4-4-4		3-7	Q67100 Q1624		

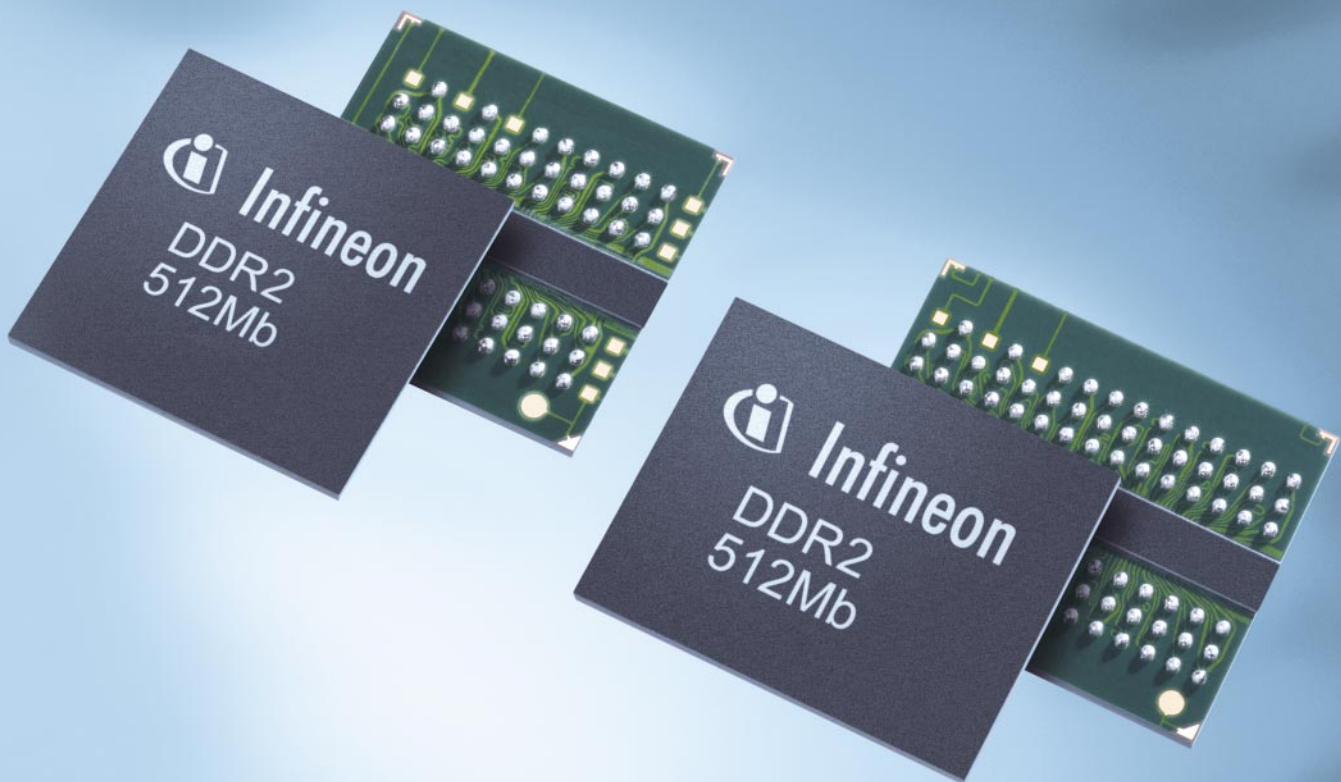



## SDR Components

Generation	Organization	Package	Speed	Latency	Sales Description	Speed No.	Ordering Code		Production	Green
<b>128 Mb</b>	32 M x 4	TSOP-54 (400 mil)	PC133	2-2-2	HYB39S128400CT-	7	Q67100	Q4101	Now	
	16 M x 8	TSOP-54 (400 mil)	PC133	2-2-2	HYB39S128800CT-	7	Q67100	Q4107		
	8 M x 16	TSOP-54 (400 mil)	PC133	2-2-2	HYB39S128160CT-	7	Q67100	Q4113		
<b>256 Mb</b>	64 M x 4	TSOP-54 (400 mil)	PC133	2-2-2	HYB39S256400DT-	7	Q67100	Q4330	Now	
	32 M x 8	TSOP-54 (400 mil)	PC133	2-2-2	HYB39S256800DT-	7	Q67100	Q4332		
	16 M x 16	TSOP-54 (400 mil)	PC133	2-2-2	HYB39S256160DT-	7	Q67100	Q4334		
<b>256 Mb FBGA</b>	64 M x 4	FBGA-54 (8 x 12 mm)	PC133	2-2-2	HYB39S256400DC-	7	Q67100	Q4772	Now	
	32 M x 8	FBGA-54 (8 x 12 mm)	PC133	2-2-2	HYB39S256800DC-	7	Q67100	Q4774		
	16 M x 16	FBGA-54 (8 x 12 mm)	PC133	2-2-2	HYB39S256160DC-	7	Q67100	Q4808		
<b>512 Mb</b>	128 M x 4	TSOP-54 (400 mil)	PC133	3-3-3	HYB39S512400AT-	7.5	Q67100	Q4404	Now	
	64 M x 8	TSOP-54 (400 mil)	PC133	3-3-3	HYB39S512800AT-	7.5	Q67100	Q4403		
	32 M x 16	TSOP-54 (400 mil)	PC133	3-3-3	HYB39S512160AT-	7.5	Q67100	Q4402		




# DRAM Modules

## Nomenclature DDR/DDR2 Modules

### Unbuffered DIMM, Registered DIMM (184-pin) and SO-DIMM (200-pin)

HYS 64 D 32 2 2 0 G D L - 6 - A (Example)

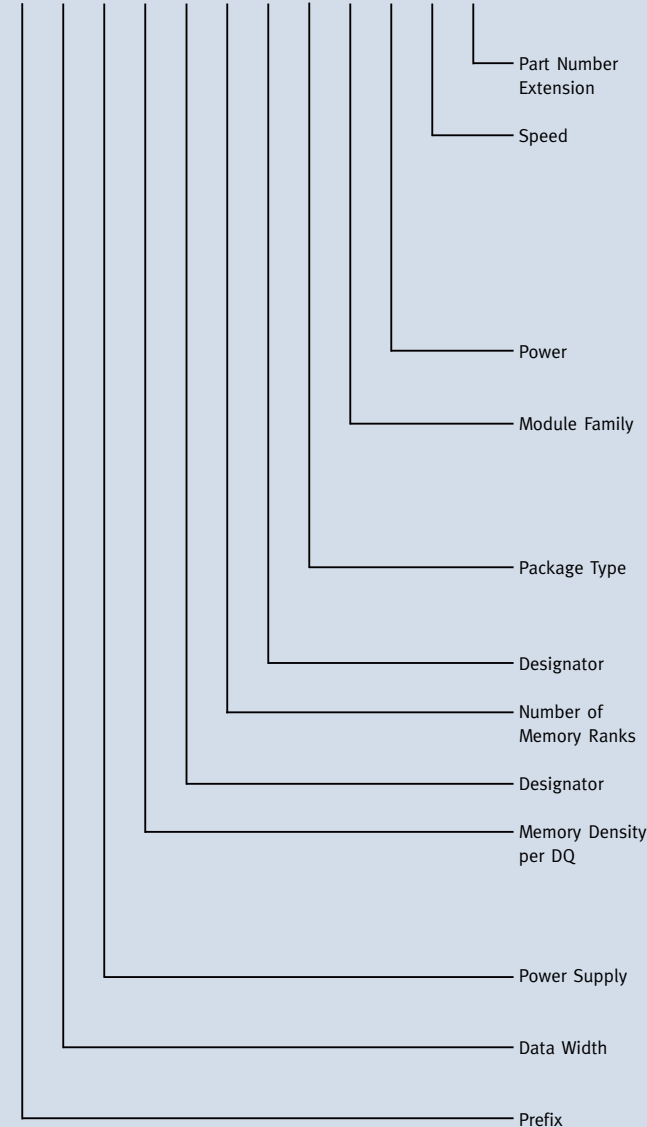

#### Component Die Revision Indicator

8	=	PC1600 2-2-2	DDR200
7.5	=	PC2100 2.5-3-3	DDR266B
7	=	PC2100 2-3-3	DDR266A
7F	=	PC2100 2-2-2	DDR266
6	=	PC2700 2.5-3-3	DDR333
5	=	PC3200 3-3-3 / PC2-3200 3-3-3	DDR400 / DDR2-400
3.7	=	PC2-4300 4-4-4	DDR2-533
3	=	PC2-5300 4-4-4	DDR2-667

L	=	Low Power
none	=	Standard Power

U	=	Unbuffered DIMM	TSOP-based for DDR / FBGA-based for DDR2
R	=	Registered DIMM	TSOP-based for DDR / FBGA-based for DDR2
D	=	SO-DIMM	TSOP-based for DDR / FBGA-based for DDR2
BD	=	SO-DIMM	FBGA-based
BR	=	Registered DIMM	FBGA-based

G	=	Contains Lead
H	=	Lead-Free (ROHS*-compliant)
E	=	Lead and Halogen-Free available on request (ROHS*-compliant)

#### Product Variations

0	=	One Memory Module Rank
2	=	Two Memory Module Ranks

#### Data Sheet Defined

16	=	16 Mb
32	=	32 Mb
64	=	64 Mb
128	=	128 Mb
256	=	256 Mb

D	=	2.5 V (DDR Modules)
T	=	1.8 V (DDR2 Modules)

64	=	x 64 (Non-ECC)
72	=	x 72 (ECC)

HYS = Standard Prefix for SDRAM-based Memory Modules

\*ROHS = Restriction Of Hazardous Substances

## DDR Modules

### Unbuffered DDR DIMM – 184-pin


Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code		Prod.	Green	
<b>128 MB</b>	16 M x 64	256 M	16 M x 16	TSOP	1	1.25"	PC2700	HYS64D16301GU-	6-B	Q67100	Q4940	Now		
							PC3200		5-B	Q67100	Q5136			
							PC2700		6-C	Q67100	Q1448			
							PC3200		5-C	Q67100	Q1754			
							PC2700	HYS64D16301HU-	6-C	Q67100	Q4995	Now		X
							PC3200		5-C	Q67100	Q5188			
<b>128 MB ECC</b>	16 M x 72	128 M	16 M x 8	TSOP	1	1.25"	PC2100	HYS72D16000GU-	7-A	Q67100	Q4367	Now		
<b>256 MB</b>	32 M x 64	256 M	32 M x 8	TSOP	1	1.25"	PC2100	HYS64D32000GU-	7-B	Q67100	Q4517	Now		
							PC2700	HYS64D32300GU-	6-B	Q67100	Q4944	Now		
							PC3200		5-B	Q67100	Q5081			
							PC2700		6-C	Q67100	Q5184			
							PC3200		5-C	Q67100	Q1755			
							PC2700	HYS64D32300HU-	6-C	Q67100	Q4996	Now		X
PC3200	5-C	Q67100	Q5189											
<b>256 MB ECC</b>	32 M x 72	256 M	32 M x 8	TSOP	1	1.25"	PC2100	HYS72D32000GU-	7-B	Q67100	Q4519	Now		
							PC2100-222		7F-B	Q67100	Q5029			
							PC2700	HYS72D32300GU-	6-B	Q67100	Q4946	Now		
							PC3200		5-B	Q67100	Q4957			
							PC2700		6-C	Q67100	Q1768			
							PC3200		5-C	Q67100	Q1756			
PC2700	HYS72D32300HU-	6-C	Q67100	Q4998	Now	X								
PC3200		5-C	Q67100	Q5191										
<b>512 MB</b>	64 M x 64	256 M	32 M x 8	TSOP	2	1.25"	PC2100	HYS64D64020GU-	7-B	Q67100	Q4521	Now		
							PC2700	HYS64D64320GU-	6-B	Q67100	Q4948	Now		
							PC3200		5-B	Q67100	Q5084			
							PC2700		6-C	Q67100	Q1449			
							PC3200		5-C	Q67100	Q1761			
							PC2700	HYS64D64320HU-	6-C	Q67100	Q5001	Now		X
PC3200	5-C	Q67100	Q5190											
<b>512 MB ECC</b>	64 M x 72	256 M	32 M x 8	TSOP	2	1.25"	PC2100	HYS72D64020GU-	7-B	Q67100	Q4525	Now		
							PC2100-222		7F-B	Q67100	Q5030			
							PC2700	HYS72D64320GU-	6-B	Q67100	Q4950	Now		
							PC3200		5-B	Q67100	Q4958			
							PC2700		6-C	Q67100	Q1757			
							PC3200		5-C	Q67100	Q1762			
PC2700	HYS72D64320HU-	6-C	Q67100	Q4997	Now	X								
PC3200		5-C	Q67100	Q5192										

X = Lead-Free

## Unbuffered DDR DIMM – 184-pin

Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green
1 GB	128 M x 64	512 M	64 M x 8	TSOP	2	1.25"	PC2100	HYS64D128020GU-	7-A	Q67100 Q4656	Now	
							PC2700		6-A	Q67100 Q4823		
							PC2700	HYS64D128320GU-	6-B	Q67100 Q1779	Now	
							PC3200		5-B	Q67100 Q1780		
							PC2700	HYS64D128320HU-	6-B	Q67100 Q1426	Now	X
							PC3200		5-B	Q67100 Q1427		
1 GB ECC	128 M x 72	512 M	64 M x 8	TSOP	2	1.25"	PC2100	HYS72D128020GU-	7-A	Q67100 Q4658	Now	
							PC2700		6-A	Q67100 Q4935		
							PC2700	HYS72D128320GU-	6-B	Q67100 Q1781	Now	
							PC3200		5-B	Q67100 Q1782		
							PC2700	HYS72D128320HU-	6-B	Q67100 Q1065	Now	X
							PC3200		5-B	Q67100 Q1064		

X = Lead-Free

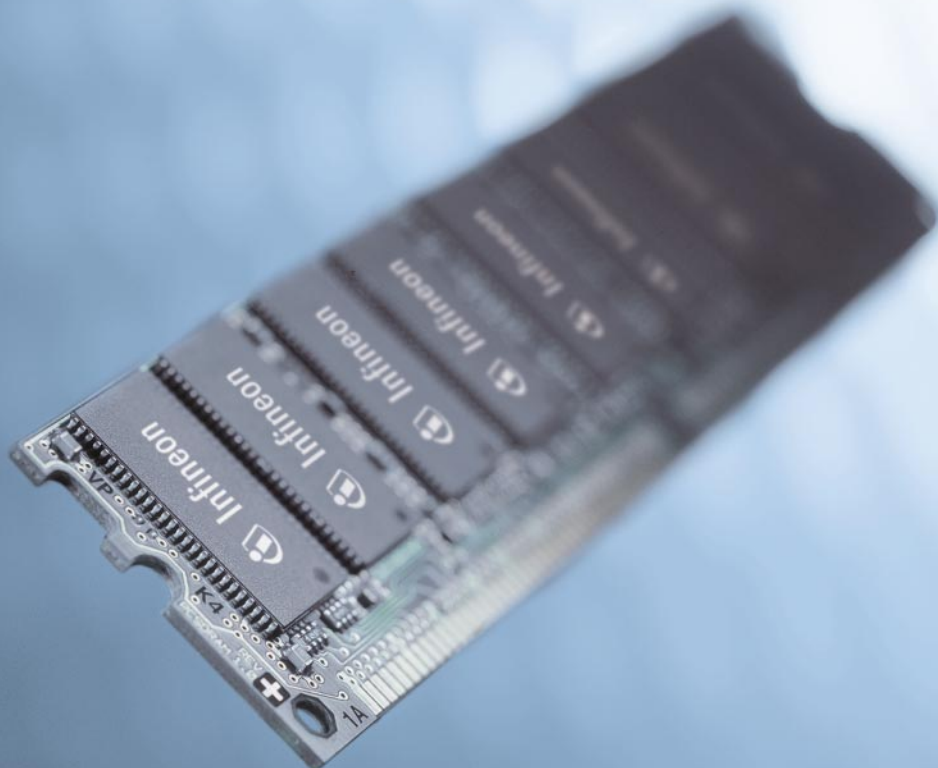

## Registered DDR DIMM (Reduced Height) – 184-pin


Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green			
<b>128 MB</b>	16 M x 72	128 M	16 M x 8	TSOP	1	1.2"	PC2100	HYS72D16500GR-	7-A	Q67100 Q4446	Now				
<b>256 MB</b>	32 M x 72	128M	32 M x 4	TSOP	1	1.2"	PC2100	HYS72D32501GR-	7-A	Q67100 Q4377					
				HYS72D32501HR-	7-C	Q67100 Q1471	3Q04	X							
			256 M	32 M x 8	TSOP	1	1.2"	PC2100	HYS72D32500GR-	7-B	Q67100 Q4457	Now			
										7-B	Q67100 Q4533				
								PC2700		6-B	Q67100 Q4671				
								PC3200	HYS72D32300GBR-	5-B	Q67100 Q1461				
								PC2700		6-C	Q67100 Q1413	2Q04			
								PC3200		5-C	Q67100 Q1673	3Q04			
<b>512 MB</b>	64 M x 72	256 M	64 M x 4	TSOP	1	1.2"	PC2100	HYS72D64500GR-	7-B	Q67100 Q4463	Now				
				PC2100-222		7F-B	Q67100 Q5007								
										PC2700		7-B	Q67100 Q4673		
									PC3200	HYS72D64300GBR-	6-B	Q67100 Q4686			
									PC2700		5-B	Q67100 Q1462			
									PC3200		6-C	Q67100 Q1415	2Q04		
								PC3200		5-C	Q67100 Q1685	3Q04			
				32 M x 8	FBGA										
										PC2100	HYS72D64320GBR-	7-B	Q67100 Q4687	Now	
										PC2700		6-B	Q67100 Q4693		
									PC3200		5-B	Q67100 Q1463			
									PC2700		6-C	Q67100 Q1414	2Q04		
							PC3200		5-C	Q67100 Q1684	3Q04				
<b>1 GB</b>	128 M x 72	256 M	128 M x 4	TSOP stack	2	1.2"	PC2100	HYS72D128521GR-	7-B	Q67100 Q4752	Now				
				PC2100-222		7F-B	Q67100 Q5008								
									PC2700	HYS72D128320GBR-	7-B	Q67100 Q4674			
									PC2700		6-B	Q67100 Q4668			
								PC2700		6-C	Q67100 Q1412	2Q04			
			512 M	128 M x 4	TSOP	1	1.2"	PC2100	HYS72D128500GR-	7-A	Q67100 Q4990	Now			
									PC2100		7-B	Q67100 Q1429	Now		
									PC2700	HYS72D128300GBR-	6-B	Q67100 Q1032			
									PC3200		5-B	Q67100 Q1687			
									PC2100		7-B	Q67100 Q1422	Now		
							PC2700	HYS72D128321GBR-	6-B	Q67100 Q1043					
						PC3200		5-B	Q67100 Q1686						
<b>2 GB</b>	256 M x 72	512 M	256 M x 4	TSOP stack	2	1.2"	PC2100	HYS72D256520GR-	7-A	Q67100 Q4661	Now				
			128 M x 4	FBGA											
										PC2700	HYS72D256320GBR-	6-B	Q67100 Q1030	Now	
						PC3200		5-B	Q67100 Q1689						

X = Lead-Free


## Registered DDR DIMM – 184-pin

Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green
128 MB	16 M x 72	128 M	16 M x 8	TSOP	1	1.7"	PC1600	HYS72D16000GR-	8-A	Q67100	Q4372	EOL
							PC2100		7-A	Q67100	Q4373	
256 MB	32 M x 72	128 M	32 M x 4	TSOP	1	1.7"	PC1600	HYS72D32001GR-	8-A	Q67100	Q4375	EOL
							PC2100		7-A	Q67100	Q4378	
	256 M	32 M x 8	TSOP	1	1.7"	PC1600	HYS72D32000GR-	8-B	Q67100	Q4508		
						PC2100		7-B	Q67100	Q4509		
512 MB	64 M x 72	256 M	64 M x 4	TSOP	1	1.7"	PC1600	HYS72D64000GR-	8-B	Q67100	Q4510	EOL
							PC2100		7-B	Q67100	Q4511	
1 GB	128 M x 72	256 M	128 M x 4	TSOP stack	2	1.7"	PC1600	HYS72D128021GR-	8-B	Q67100	Q4743	EOL
							PC2100		7-B	Q67100	Q4694	

EOL = End of Life

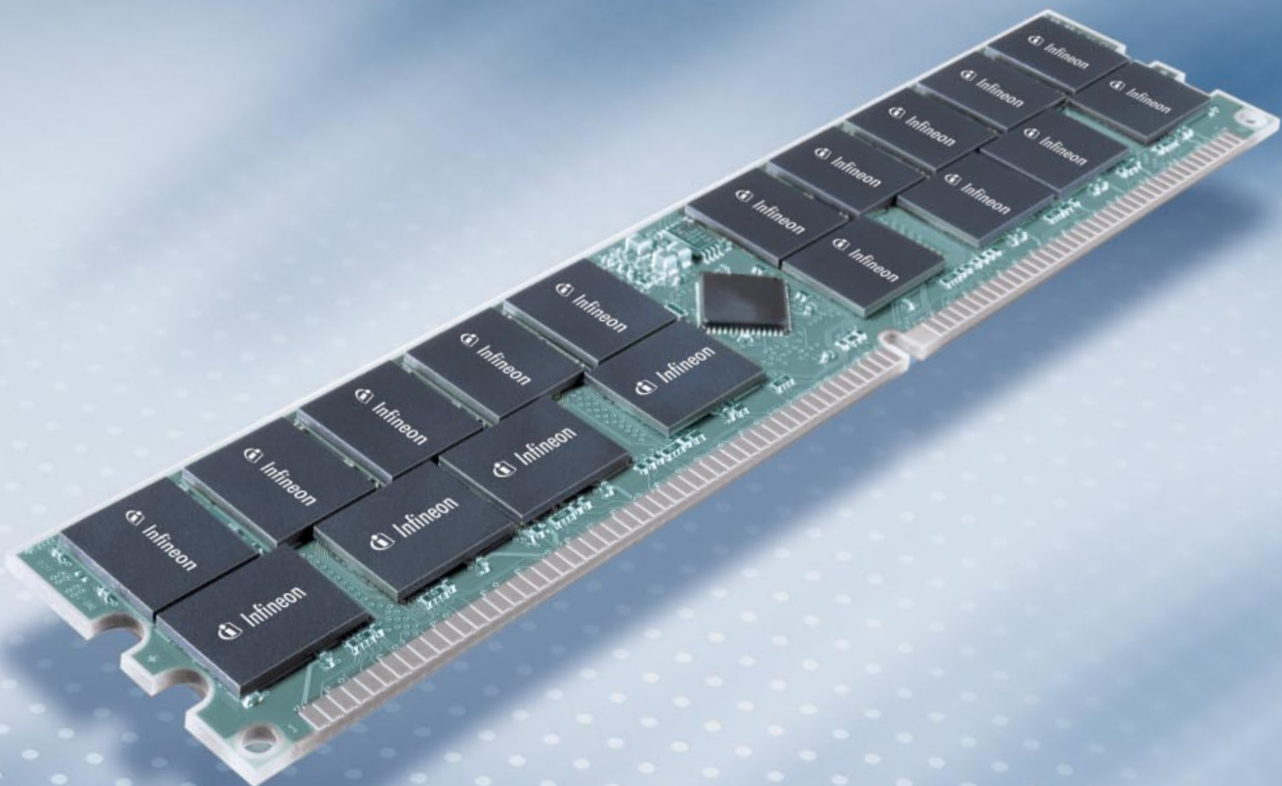



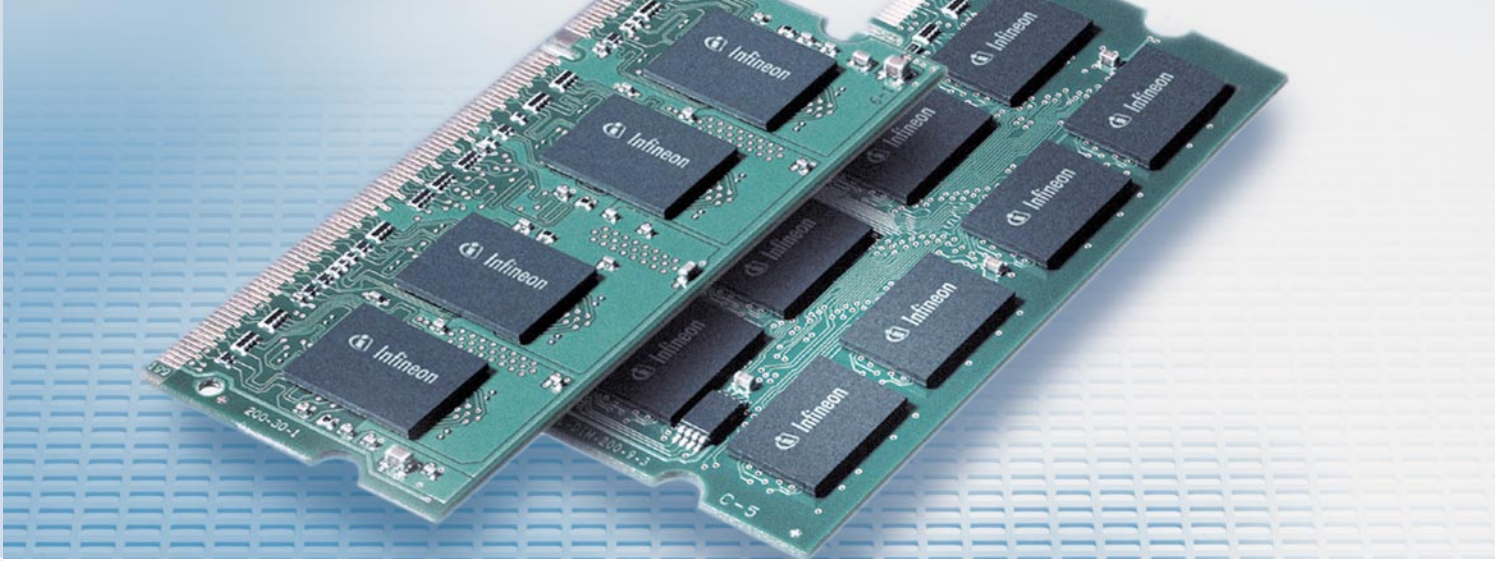

### SO-DIMM DDR – 200-pin

Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green	
<b>128 MB</b>	16 M x 64	256 M	16 M x 16	TSOP	1	1,25"	PC2100	HYS64D16001GDL-	7-B	Q67100	Q5179	Now	X
							PC2700		6-B	Q67100	Q5187		
							PC2100	HYS64D16000GDL-	7-B	Q67100	Q4531	2Q04	
							PC2700		6-B	Q67100	Q4670		
							PC2700	HYS64D16000HDL-	6-C	Q67100	Q1763	2Q04	
							PC2700		6-C	Q67100	Q5078	2Q04	
<b>256 MB</b>	32 M x 64	256 M	16 M x 16	TSOP	2	1,25"	PC2100	HYS64D32020GDL-	7-B	Q67100	Q4454	Now	X
							PC2700		6-B	Q67100	Q4667		
							PC3200		5-B	Q67100	Q5227		
							PC2700	HYS64D32020HDL-	6-C	Q67100	Q1767	2Q04	
							PC3200		5-C	Q67100	Q1769		
							PC2700	HYS64D32020HDL-	6-C	Q67100	Q4831	2Q04	
							PC3200		5-C	Q67100	Q1699		
<b>512 MB</b>	64 M x 64	256M	32 M x 8	FBGA	2	1,25"	PC2100	HYS64D64020GBDL-	7-B	Q67100	Q4680	Now	X
							PC2700		6-B	Q67100	Q4681		
							PC3200		5-B	Q67100	Q1193		
							PC2700	HYS64D64020HBDL-	6-C	Q67100	Q1450	2Q04	
							PC3200		5-C	Q67100	Q1702		
							PC2700		6-C	Q67100	Q4835	3Q04	
	64 M x 64	512 M	32 M x 16	TSOP	2	1,25"	PC2100	HYS64D64020GDL-	7-A	Q67100	Q4663	Now	X
							PC2700		6-A	Q67100	Q4744		
							PC2700		6-B	Q67100	Q1774		
							PC3200	HYS64D64020HDL-	5-B	Q67100	Q1783	Now	
							PC2700		6-B	Q67100	Q1423		
							PC3200		5-B	Q67100	Q1698		
<b>1 GB</b>	128 M x 64	512 M	64 M x 8	FBGA	2	1,25"	PC2700	HYS64D128021GBDL-	6-B	Q67100	Q1416	Now	X
							PC3200		5-B	Q67100	Q1694		
							PC2700	HYS64D128021HBDL-	6-B	Q67100	Q1028	Now	
							PC3200		5-B	Q67100	Q1695		


X = Lead-Free

# DDR2 Modules

## Nomenclature DDR/DDR2 Modules

### Unbuffered DIMM, Registered DIMM (240-pin) and SO-DIMM (200-pin)

HYS 64 D 32 2 2 0 G D L - 6 - A (Example)

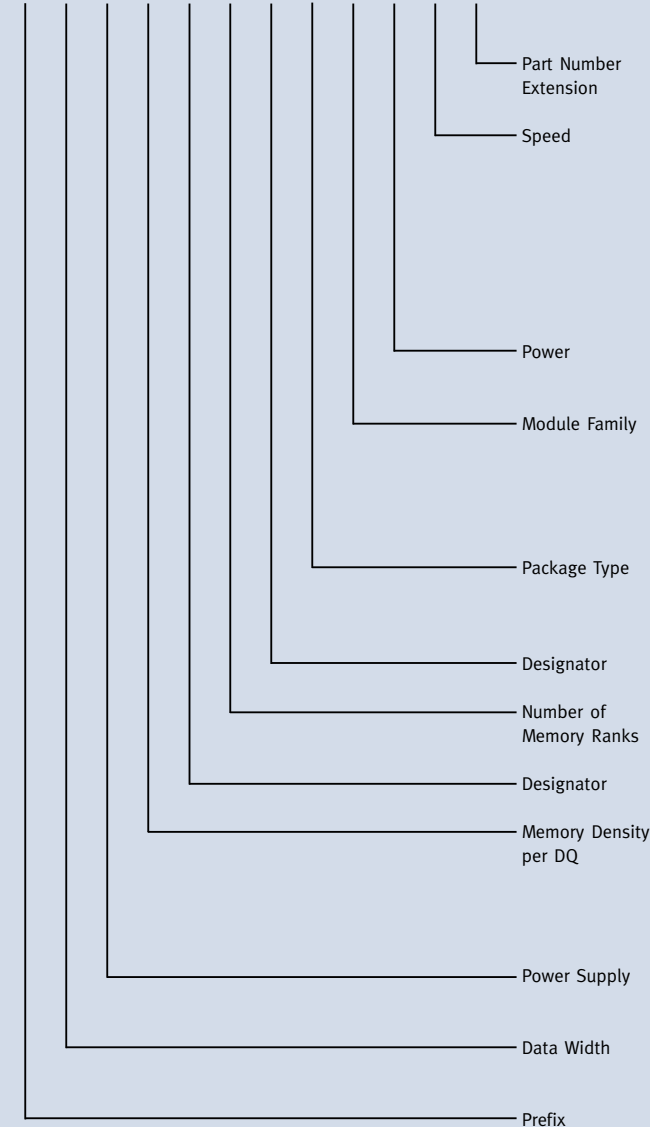

#### Component Die Revision Indicator

8	=	PC1600 2-2-2	DDR200
7.5	=	PC2100 2.5-3-3	DDR266B
7	=	PC2100 2-3-3	DDR266A
7F	=	PC2100 2-2-2	DDR266
6	=	PC2700 2.5-3-3	DDR333
5	=	PC3200 3-3-3 / PC2-3200 3-3-3	DDR400 / DDR2-400
3.7	=	PC2-4300 4-4-4	DDR2-533
3	=	PC2-5300 4-4-4	DDR2-667

L	=	Low Power
none	=	Standard Power

U	=	Unbuffered DIMM	TSOP-based for DDR / FBGA-based for DDR2
R	=	Registered DIMM	TSOP-based for DDR / FBGA-based for DDR2
D	=	SO-DIMM	TSOP-based for DDR / FBGA-based for DDR2
BD	=	SO-DIMM	FBGA-based
BR	=	Registered DIMM	FBGA-based

G	=	Contains Lead
H	=	Lead-Free (ROHS* -compliant)
E	=	Lead and Halogen-Free available on request (ROHS* -compliant)

#### Product Variations

0	=	One Memory Module Rank
2	=	Two Memory Module Ranks

#### Data Sheet Defined

16	=	16 Mb
32	=	32 Mb
64	=	64 Mb
128	=	128 Mb
256	=	256 Mb

D	=	2.5 V (DDR Modules)
T	=	1.8 V (DDR2 Modules)

64	=	x 64 (Non-ECC)
72	=	x 72 (ECC)

HYS = Standard Prefix for SDRAM-based Memory Modules

\*ROHS = Restriction Of Hazardous Substances

## Unbuffered DDR2 DIMM – 240-pin


Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green	
256 MB	32Mx64	512M	32Mx16	PTFBGA84	1	30 mm	PC2-3200 3-3-3	HYS64T32000GU	5-A	Q67100	Q1386	2Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1387		
256 MB ECC	32 M x 72	256 M	32 M x 8	PTFBGA60	1	30 mm	PC2-3200 3-3-3	HYS72T32000GU	5-A	Q67100	Q1371	3Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1370		
512 MB	64 M x 64	512 M	64 M x 8	PTFBGA60	1	30 mm	PC2-3200 3-3-3	HYS64T64000GU	5-A	Q67100	Q1389	2Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1390		
512 MB ECC	64 M x 72	512 M	64 M x 8	PTFBGA60	1	30 mm	PC2-3200 3-3-3	HYS72T64000GU	5-A	Q67100	Q1392	2Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1393		
1 GB	128 M x 64	512 M	64 M x 8	PTFBGA60	2	30 mm	PC2-3200 3-3-3	HYS64T128020GU	5-A	Q67100	Q1395	2Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1396		
1 GB ECC	128 M x 72	512 M	64 M x 8	PTFBGA60	2	30 mm	PC2-3200 3-3-3	HYS72T128020GU	5-A	Q67100	Q1398	2Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1399		
2 GB	256 M x 64	1 G	128 M x 8	PTFBGA68	2	30 mm	PC2-3200 3-3-3	HYS64T256020GU	5-A	Q67100	Q1739	3Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1740		
2 GB ECC	256 M x 72	1 G	128 M x 8	PTFBGA68	2	30 mm	PC2-3200 3-3-3	HYS72T256020GU	5-A	Q67100	Q1741	3Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1742		

## Registered DDR2 DIMM – 240-pin

Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green	
256 MB	32 M x 72	256 M	32 M x 8	PTFBGA60	1	30 mm	PC2-3200 3-3-3	HYS72T32000GR	5-A	Q67100	Q1326	3Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1330		
512 MB	64 M x 72	256 M	64 M x 4	PTFBGA60	1	30 mm	PC2-3200 3-3-3	HYS72T64001GR	5-A	Q67100	Q1715	3Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1716		
			32 M x 8	PTFBGA60	2	30 mm	PC2-3200 3-3-3	HYS72T64020GR	5-A	Q67100	Q1367		
							PC2-4300 4-4-4		3.7-A	Q67100	Q1366		
		512 M	64 M x 8	PTFBGA60	1	30 mm	PC2-3200 3-3-3	HYS72T64000GR	5-A	Q67100	Q1378	2Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1379		
1 GB	128 M x 72	512 M	128 M x 4	PTFBGA60	1	30 mm	PC2-3200 3-3-3	HYS72T128000GR	5-A	Q67100	Q1380	2Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1381		
			64 M x 8	PTFBGA60	2	30 mm	PC2-3200 3-3-3	HYS72T128020GR	5-A	Q67100	Q1382		
							PC2-4300 4-4-4		3.7-A	Q67100	Q1383		
2 GB	256 M x 72	512 M	128 M x 4	PTFBGA60	2	30 mm	PC2-3200 3-3-3	HYS72T256220GR	5-A	Q67100	Q1891	3Q04	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1918		
		1 G	256 M x 4	PTFBGA68	1	30 mm	PC2-3200 3-3-3	HYS72T256000GR	5-A	Q67100	Q1735		
							PC2-4300 4-4-4		3.7-A	Q67100	Q1736		
4 GB	512 M x 72	1 G	512 M x 4	SDFBGA	2	30 mm	PC2-3200 3-3-3	HYS72T512022GR	5-A	Q67100	Q1737	1Q05	
							PC2-4300 4-4-4		3.7-A	Q67100	Q1738		

## SO-DIMM DDR2 – 200-pin


Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green
256 MB	32 M x 64	512 M	32 M x 16	PTFBGA84	1	30 mm	PC2-3200 3-3-3	HYS64T32000GDL-	5-A	Q67100	Q1401	3Q04
							PC2-4300 4-4-4		3.7-A	Q67100	Q1402	
512 MB	64 M x 64	512 M	32 M x 16	PTFBGA84	2	30 mm	PC2-3200 3-3-3	HYS64T64020GDL-	5-A	Q67100	Q1404	3Q04
							PC2-4300 4-4-4		3.7-A	Q67100	Q1405	
1 GB	128 M x 64	512 M	128 M x 8	SDFBGA	2	30 mm	PC2-3200 3-3-3	HYS64T128022GDL-	5-A	Q67100	Q1692	3Q04
							PC2-4300 4-4-4		3.7-A	Q67100	Q1691	
	1 G	64 M x 16	PTFBGA92	2	30 mm	PC2-3200 3-3-3	HYS64T128020GDL-	5-A	Q67100	Q1743		
						PC2-4300 4-4-4		3.7-A	Q67100	Q1744		
2 GB	256 M x 64	1 G	256 M x 8	SDFBGA	2	30 mm	PC2-3200 3-3-3	HYS64T256022GDL-	5-A	Q67100	Q1745	4Q04
							PC2-4300 4-4-4		3.7-A	Q67100	Q1746	

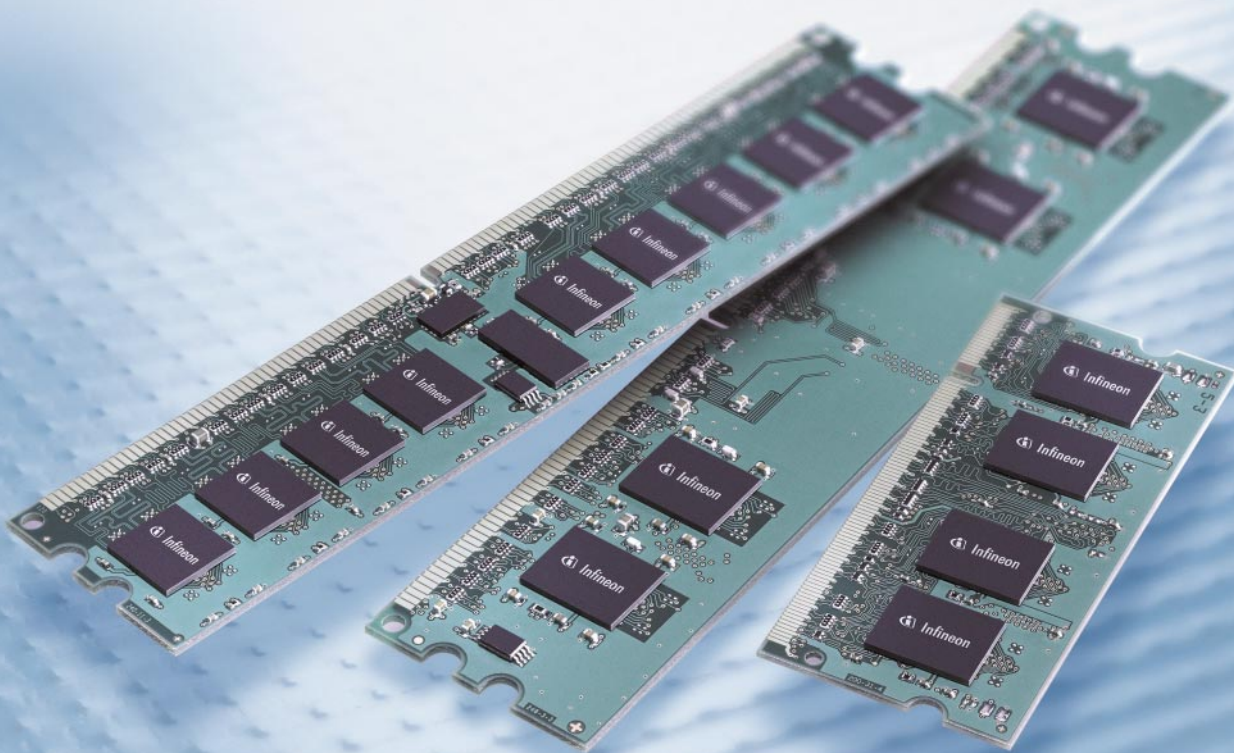

# SDR Modules

## Nomenclature SDR Modules

Unbuffered DIMM, Registered DIMM (168-pin) and SO-DIMM (144-pin)

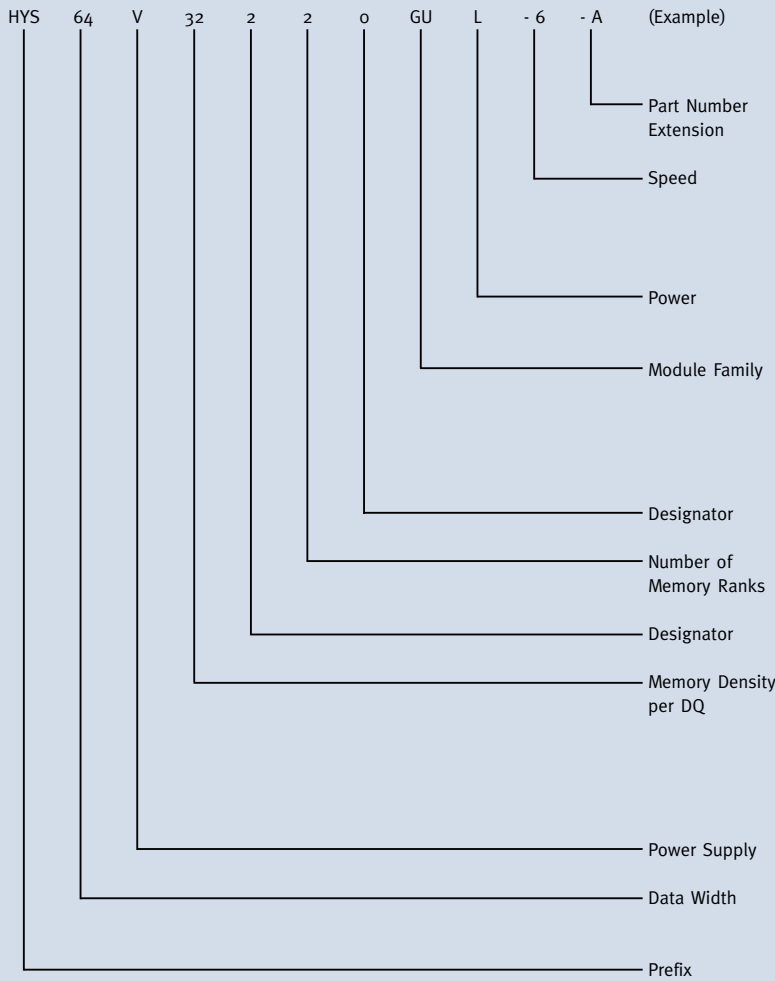

### Component Die Revision Indicator

- 6 = 166 MHz (PC166 3-3-3)
- 7 = 133 MHz (PC133 2-2-2)
- 7.5 = 133 MHz (PC133 3-3-3)
- 8 = 100 MHz (PC100 2-2-2)

- L = Low-Power Product
- none = Standard-Power Product

- GU = Unbuffered 168-pin DIMM
- GR = Registered 168-pin DIMM
- GBR = Registered 168-pin DIMM (FBGA-based)
- GD = 144-pin Small Outline DIMM (SO-DIMM)
- GBD = 144-pin SO-DIMM (FBGA-based)

### Product Variations

- 0 = One Memory Module Rank
- 2 = Two Memory Module Ranks

### Data Sheet Defined

- 8 = 8 Mb
- 16 = 16 Mb
- 32 = 32 Mb
- 64 = 64 Mb
- 128 = 128 Mb
- 256 = 256 Mb

- V = 3.3 V (SDR Modules)

- 64 = x 64 (Non-ECC)
- 72 = x 72 (ECC)

- HYS = Standard Prefix for SDRAM-based Memory Modules






## Unbuffered SDR DIMM – 168-pin

Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green
<b>128 MB</b>	16 M x 64	128 M	16 M x 8	TSOP	1	1.25"	PC133 3-3-3	HYS64V16300GU-	7.5-C2	Q67100 Q4079	EOL	
							PC133 2-2-2		7-C2	Q67100 Q4080		
	256 M	16 M x 16	TSOP	1	1.15"	PC133 3-3-3	HYS64V16302GU-	7.5-D	Q67100 Q4466			
						PC133 2-2-2		7-D	Q67100 Q4442			
<b>128 MB ECC</b>	16 M x 72	128 M	16 M x 8	TSOP	1	1.25"	PC133 3-3-3	HYS72V16300GU-	7.5-C2	Q67100 Q4085	EOL	
							PC133 2-2-2		7-C2	Q67100 Q4086		
<b>256 MB</b>	32 M x 64	128 M	16 M x 8	TSOP	2	1.25"	PC133 3-3-3	HYS64V32220GU-	7.5-C2	Q67100 Q4082	EOL	
							PC133 2-2-2		7-C2	Q67100 Q4083		
	256 M	32 M x 8	TSOP	1	1.25"	PC133 3-3-3	HYS64V32300GU-	7.5-D	Q67100 Q4359			
						PC133 2-2-2		7-D	Q67100 Q4361			
<b>256 MB ECC</b>	32 M x 72	128 M	16 M x 8	TSOP	2	1.25"	PC133 3-3-3	HYS72V32220GU-	7.5-C2	Q67100 Q4088	EOL	
							PC133 2-2-2		7-C2	Q67100 Q4089		
	256 M	32 M x 8	TSOP	1	1.25"	PC133 3-3-3	HYS72V32300GU-	7.5-D	Q67100 Q4362			
						PC133 2-2-2		7-D	Q67100 Q4360			
<b>512 MB</b>	64 M x 64	256 M	32 M x 8	TSOP	2	1.25"	PC133 3-3-3	HYS64V64220GU-	7.5-D	Q67100 Q4390	EOL	
							PC133 2-2-2		7-D	Q67100 Q4389		
<b>512 MB ECC</b>	64 M x 72	256 M	32 M x 8	TSOP	2	1.25"	PC133 3-3-3	HYS72V64220GU-	7.5-D	Q67100 Q4387	EOL	
							PC133 2-2-2		7-D	Q67100 Q4388		

EOL = End of Life

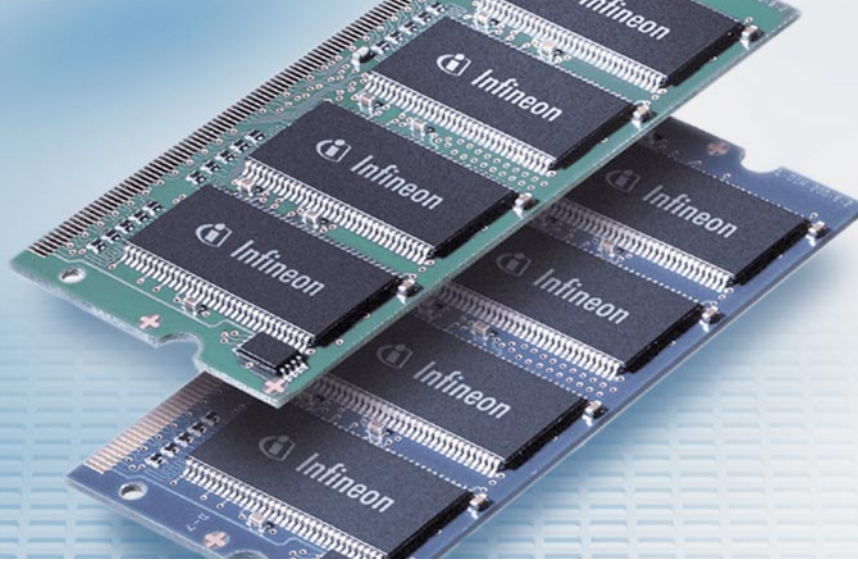

### Registered SDR DIMM – 168-pin

Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green	
<b>128 MB</b>	16 M x 72	128 M	16 M x 8	TSOP	1	1.5"	PC133 3-3-3	HYS72V16301GR-	7.5-C2	Q67100	Q4091	EOL	
							PC133 2-2-2		7-C2	Q67100	Q4092		
<b>256 MB</b>	32 M x 72	128 M	32 M x 4	TSOP	1	1.5"	PC133 3-3-3	HYS72V32301GR-	7.5-C2	Q67100	Q4094	EOL	
		256 M	32 M x 8	TSOP	1	1.5"	PC133 3-3-3	HYS72V32300GR-	7.5-D	Q67100	Q4479		
							PC133 2-2-2		7-D	Q67100	Q4440		
<b>512 MB</b>	64 M x 72	256 M	64 M x 4	TSOP	1	1.5"	PC133 3-3-3	HYS72V64300GR-	7.5-D	Q67100	Q4474	EOL	
							PC133 2-2-2		7-D	Q67100	Q4441		
<b>1 GB</b>	128 M x 72	256 M	128 M x 4	TSOP stack	2	1.5"	PC133 3-3-3	HYS72V128321GR-	7.5-D	Q67100	Q4725	EOL	
							PC133 2-2-2		7-D	Q67100	Q4726		
							PC133 3-3-3	HYS72V128320GR-	7.5-D	Q67100	Q4475		
							PC133 2-2-2		7-D	Q67100	Q4439		

EOL = End of Life


### SO-DIMM SDR – 144-pin

Module Density	Organization	Generation	Compo. Organization	Compo. Package	# of Ranks on Module	Module Height	Module Speed	Sales Description	Speed No.	Ordering Code	Prod.	Green	
<b>128 MB</b>	16 M x 64	128 M	8 M x 16	TSOP	2	1.00"	PC133 3-3-3	HYS64V16220GDL-	7.5-C2	Q67100	Q4342	EOL	
		256 M	16 M x 16	TSOP	1	1.00"	PC133 3-3-3	HYS64V16200GDL-	7.5-D	Q67100	Q4478		
							PC133 2-2-2		7-D	Q67100	Q4363		
<b>256 MB</b>	32 M x 64	256 M	16 M x 16	TSOP	2	1.00"	PC133 3-3-3	HYS64V32220GDL-	7.5-D	Q67100	Q4472	EOL	
							PC133 2-2-2		7-D	Q67100	Q4444		
<b>512 MB</b>	64 M x 64	256 M	32 M x 8	FBGA	2	1.15"	PC133 3-3-3	HYS64V64220GBDL-	7.5-D	Q67100	Q4499	EOL	
							PC133 2-2-2		7-D	Q67100	Q4501		

EOL = End of Life

# Specialty DRAMs


## Nomenclature Reduced Latency DRAM (RLDRAM™)

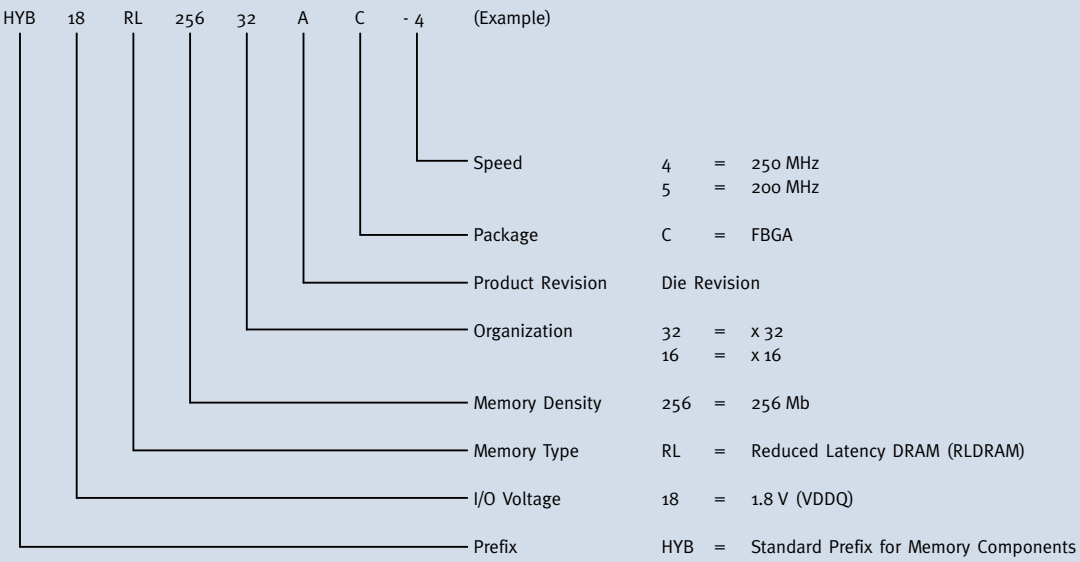


## Reduced Latency DRAM (RLDRAM™)

Density	Organization	Power Supply	Speed	Sales Description	Speed No.	Ordering Code	Package	Prod.	Green
256 Mb	8 M x 32	2.5 V / 1.8 V VDDQ	250 MHz	HYB18RL25632AC-	4	Q67100 Q4355	T-FBGA-144	Now	
			200 MHz		5	Q67100 Q4357			
	16 M x 16		250 MHz	HYB18RL25616AC-	4	Q67100 Q4356			
			200 MHz		5	Q67100 Q4358			

## Nomenclature Graphics RAM and Mobile-RAM

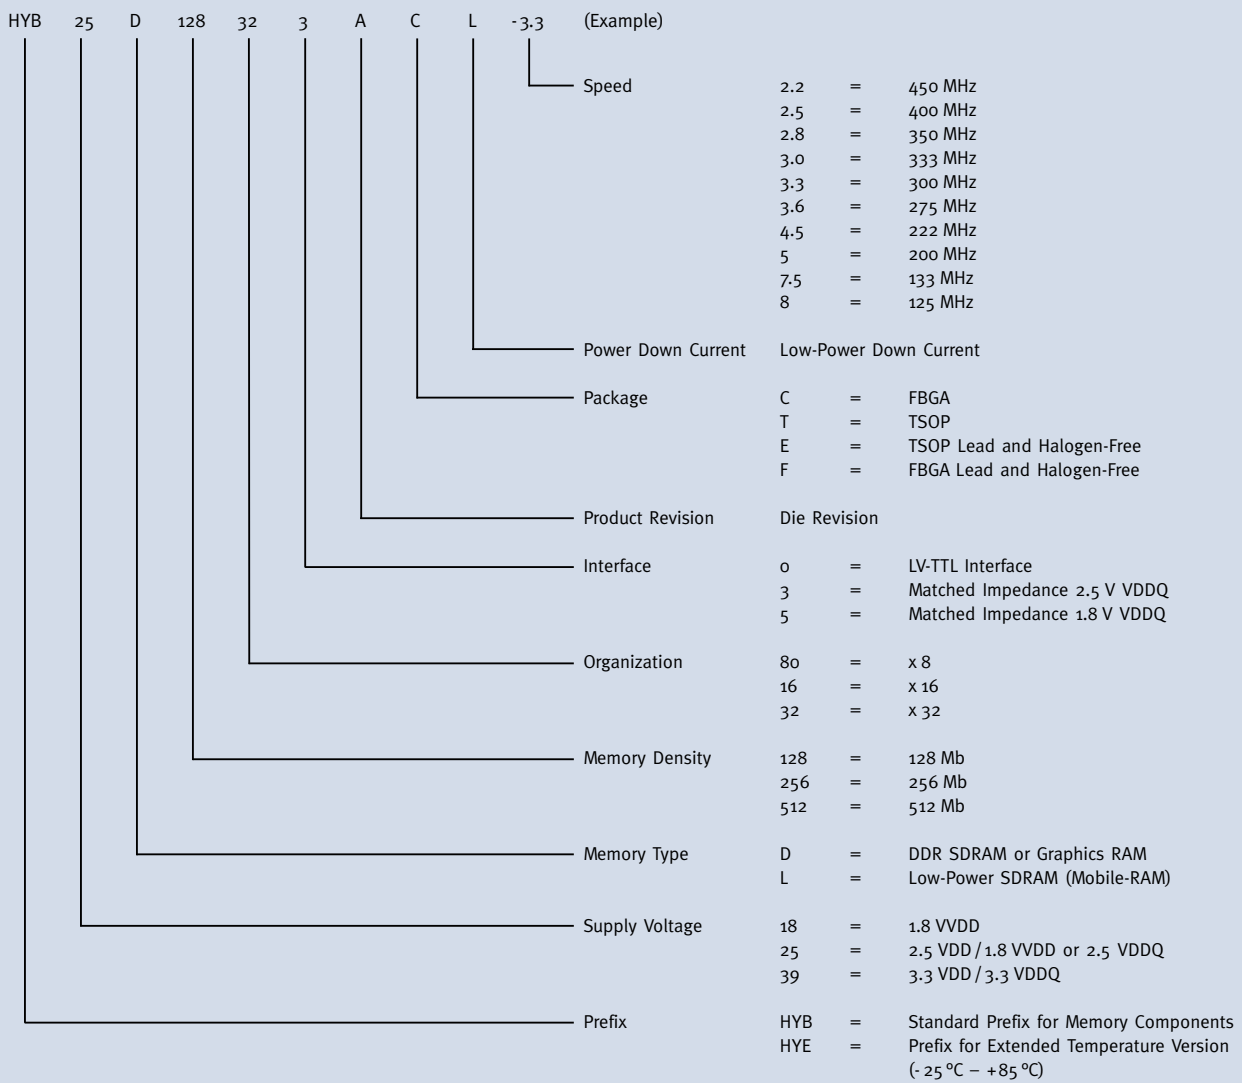

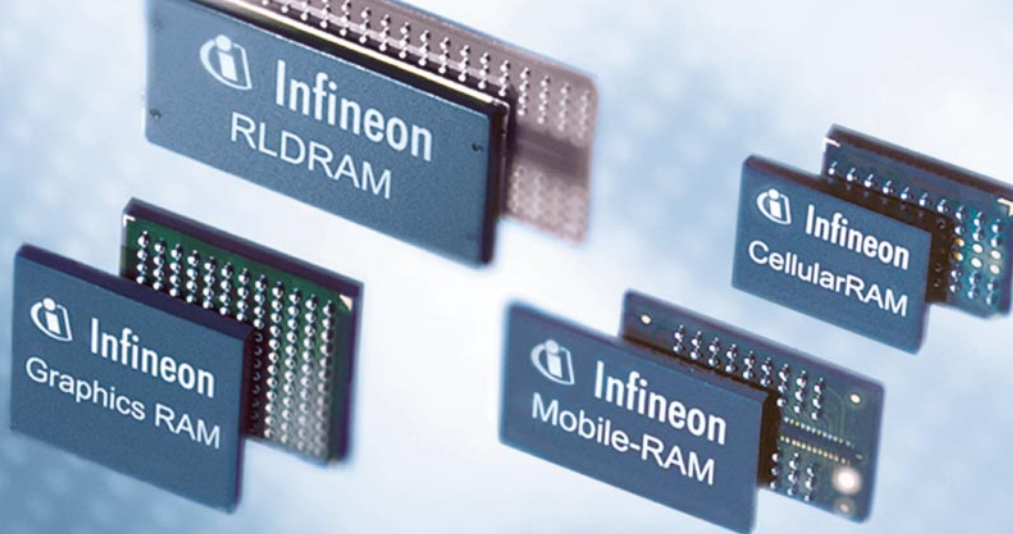

## Graphics RAM

Density	Organization	Power Supply	Speed	Sales Description	Speed No.	Ordering Code	Package	Prod.	Green
128 Mb	4 M x 32	2.5 V	333 MHz	HYB25D128323C-	3.0	Q67100 Q4866	FBGA-144	EOL	
			300 MHz		3.3	Q67100 Q4121			
			275 MHz		3.6	Q67100 Q4348			
			222 MHz	3.6	Q67100 Q4930				
				4.5	Q67100 Q4123				
				4.5	Q67100 Q4786				
256 Mb	16 M x 16	2.5 V	166 MHz	HYB25D256160BT-	6.0	Q67100 Q4592	TSOP-66	Now	
			200 MHz		5.0	Q67100 Q4277			
			200 MHz	HYB25D256161CE-	5.0	Q67100 Q1408		Now	XX
			250 MHz		4.0	Q67100 Q1409			
	8 M x 32	1.8 V	500 MHz	HYB18T256321F-	20	Q67100 Q4868	FBGA-144	3Q04	X
			450 MHz		22	Q67100 Q4869			
			400 MHz		25	Q67100 Q4870			

XX = Lead and Halogen-Free    X = Lead-Free    EOL = End of Life


## Mobile-RAM

Density	Organization	Power Supply Core	Power Supply I/O	Speed	Latency	Sales Description	Speed No.	Ordering Code	Package	Prod.	Green		
128 Mb	8 M x 16	2.5 V	2.5 V / 1.8 V	133 MHz	3-3-3	HYB25L128160AC-	7.5	Q67100 Q4542	FBGA-54	Now			
						HYE25L128160AC-	7.5 ETR	Q67100 Q4544					
		3.3 V	3.3 V			HYB39L128160AT-	7.5	Q67100 Q4624	TSOP-54				
						HYB39L128160AC-	7.5	Q67100 Q4546	FBGA-54				
		1.8 V	1.8 V			HYB18L128160BF-	7.5	Q67100 Q1581	FBGA-54			2Q04	XX
						HYB18L128160BC-	7.5	Q67100 Q1588	FBGA-54			2Q04	○
256 Mb	16 M x 16	2.5 V	2.5 V / 1.8 V	133 MHz	3-3-3	HYB25L256160AC-	7.5	Q67100 Q5145	FBGA-54	Now			
						HYE25L256160AC-	7.5 ETR	Q67100 Q5148					
		3.3 V	3.3 V			HYB39L256160AC-	7.5	Q67100 Q5144	FBGA-54				
						HYB39L256160AT-	7.5	Q67100 Q4627	TSOP-54				
		1.8 V	1.8 V			HYB18L256160BF-	7.5	Q67100 Q1295	FBGA-54			2Q04	XX
						HYB18L256160BC-	7.5	Q67100 Q1577	FBGA-54			2Q04	○
512 Mb	Dual 16 M x 16	3.3 V or 2.5 V	3.3 V or 2.5 V / 1.8 V	133 MHz	3-3-3	HYB25L512160AC-	7.5	Q67100 Q4921	FBGA-54	Now			
						HYE25L512160AC-	7.5 ETR	Q67100 Q4923					

○ = Halogen-Free    XX = Lead and Halogen-Free    ETR = Extended Temperature



## Nomenclature CellularRAM™

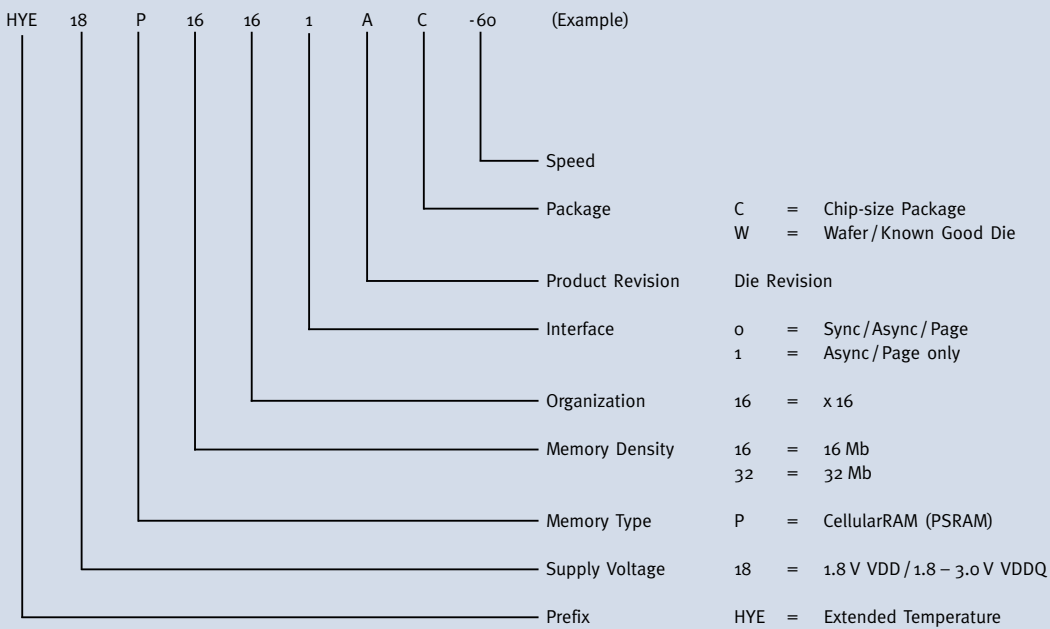


## CellularRAM™

Density	Organization	Interface	Speed	Sales Description	Speed No.	Ordering Code	Package	Prod.	Green
<b>16 Mb Async</b>	1 M x 16	SRAM	85 ns	HYE18P16161AC-	85	Q67100 Q5098	VFBGA-48	2Q04	X
			70 ns		70	Q67100 Q5099	VFBGA-48		
			70 ns	HYE18P16161AW-	70	Q67100 Q5101	Wafer/KGD		
<b>32 Mb Async</b>	2 M x 16	SRAM	85 ns	HYE18P32161AC-	85	Q67100 Q5103	VFBGA-48	2Q04	X
			70 ns		70	Q67100 Q5104	VFBGA-48		
			70 ns	HYE18P32161AW-	70	Q67100 Q5106	Wafer/KGD		
<b>32 Mb Sync</b>	2 M x 16	SRAM / Flash	80 MHz / 70 ns	HYE18P32160AC-	12.5	Q67100 Q1802	VFBGA-54	2Q04	X
			66 MHz / 85 ns		15	Q67100 Q5108	VFBGA-54		
			66 MHz / 85 ns	HYE18P32160AW-	15	Q67100 Q5110	Wafer/KGD		

X = Lead-Free

# Flash

## Nomenclature TwinFlash™ Components

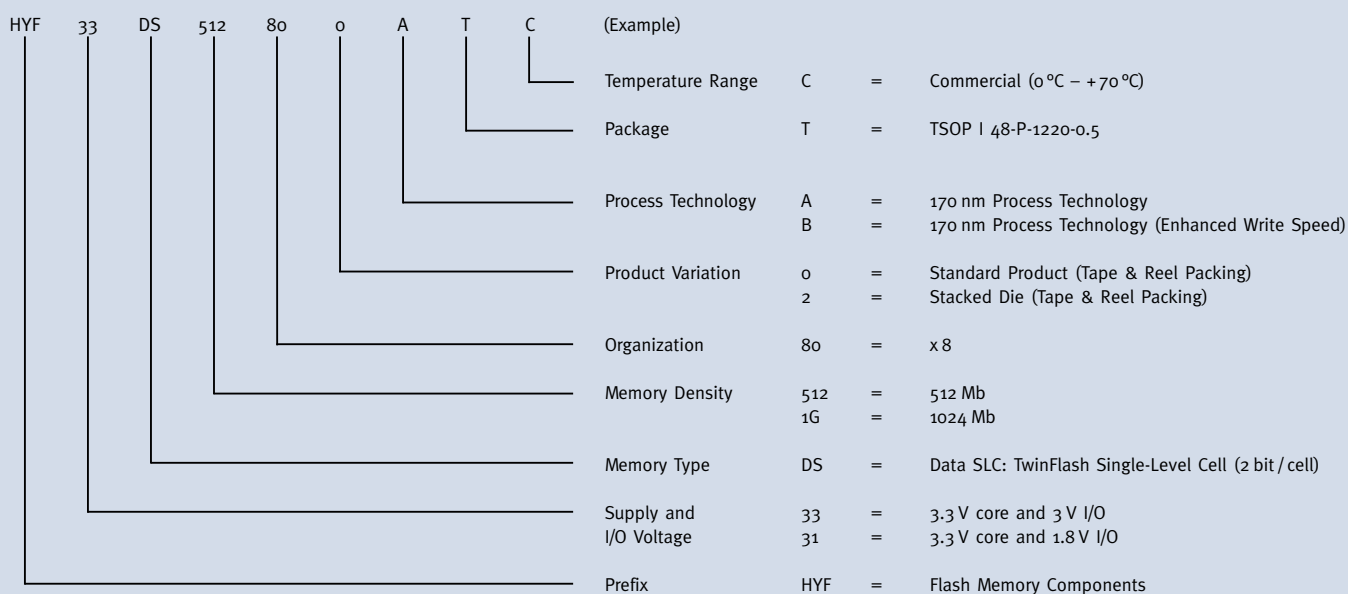

## TwinFlash™ Components

Density	Organization	Page Size	Block Size	Core Voltage	I/O Voltage	Write Speed	Sales Description	Ordering Code	Package
512 Mb	64 M x 8	512 + 16 Bytes	16 K + 512 Bytes	3 V	3 V	Normal	HYF33DS51280oATC	On request	P-TSOP1-48
					3 V	Enhanced	HYF33DS51280oBTC		
					1.8 V	Enhanced	HYF31DS51280oBTC		
1 Gb	128 M x 8	512 + 16 Bytes	16 K + 512 Bytes	3 V	3 V	Normal	HYF33DS1G802ATC	On request	P-TSOP1-48
					3 V	Enhanced	HYF33DS1G802BTC		
					1.8 V	Enhanced	HYF31DS1G802BTC		



## Nomenclature TwinFlash™ Cards

Character	Value	Parameter	Meaning
HYC	3	Type	C = Flash Card
N	256	Technology	N = TWIN-NAND
0	NO	Label Shortcut	NO = No label, IF = IFX label
5	0	Speed	0 = Standard, 1 = Future use
AA	1	Firmware	AA = 1st firmware, AB = 2nd firmware
1	A	Controller Generation	1 = 1st generation, 2 = 2nd generation
A	A	Memory Revision	A = 170 nm Process Technology, B = 110 nm Process Technology
A	A	Package	A = SD (commercial), B = MMC (commercial), C = miniSD (commercial), D = mini MMC (commercial)
0	0	Content	0 = No content, 1 = Content 1 rev. label
5	0	Label Size	0 = No label, 1 = 16 MB, 2 = 32 MB, 3 = 64 MB, 4 = 128 MB, 5 = 256 MB, 6 = 512 MB, 7 = 1 GB
0	0	Memory Capacity	64 = 64 MB, 128 = 128 MB, 256 = 256 MB, 512 = 512 MB, 01G = 1024 MB
0	0	Supply Voltage	3 = 3.3 V Core, 1 = 1.8 V Core (Dual-Voltage)

## TwinFlash™ Cards


Card	Density	Operating Voltage	Sales Description	Ordering Code
Multi Media Cards	64 MB	2.7 V – 3.6 V	HYC3N0640NO00AA1AB	On request
	128 MB		HYC3N1280NO00AA1AB	
	256 MB		HYC3N2560NO00AA1AB	
SD Cards	64 MB	2.7 V – 3.6 V	HYC3N0640NO00AA1AA	On request
	128 MB		HYC3N1280NO00AA1AA	
	256 MB		HYC3N2560NO00AA1AA	

## More detailed Information on Memory Products is available:

On our Internet websites:

[www.infineon.com/memory](http://www.infineon.com/memory) and [www.infineon.com/memory/flash](http://www.infineon.com/memory/flash)

- Datasheets
- Simulation models
- Memory Spectrum (PDF version)
- Brochures (PDF version)

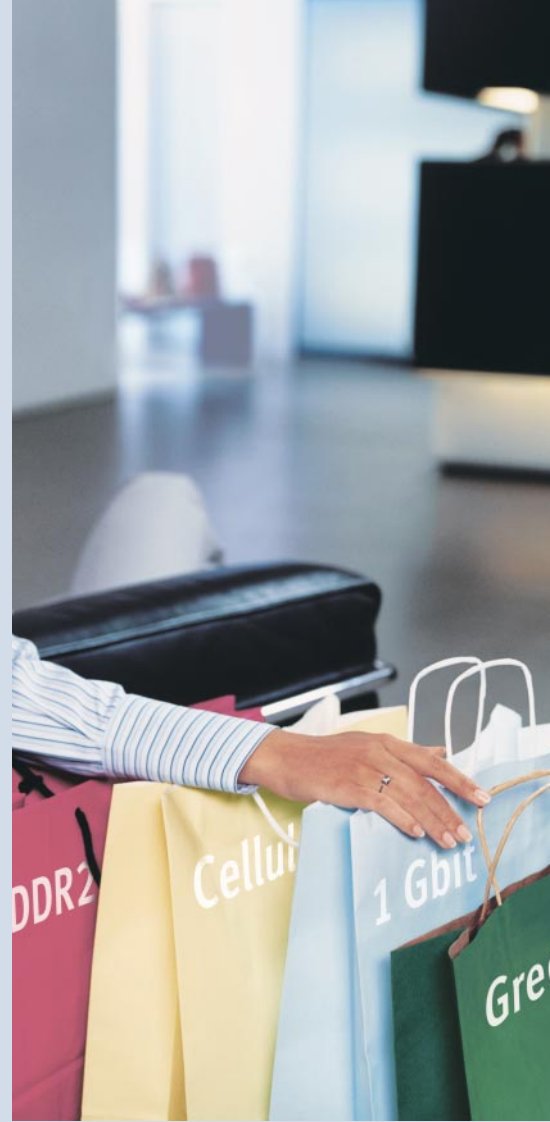

Edition 2004 April

Published by  
Infineon Technologies AG,  
St.-Martin-Straße 53,  
D-81669 München

© Infineon Technologies AG 2004.  
All Rights Reserved.

### **Please note**

The information in this document is subject to change without notice. The information herein describes certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved. We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

### **Information**

For further information on technology, delivery terms and conditions and prices, please contact your nearest Infineon Technologies office in Germany or our Infineon Technologies representatives worldwide. ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Infineon Technologies components may only be used in life-support devices or systems with the express written approval of Infineon Technologies if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life-support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

# INFINEON TECHNOLOGIES SALES OFFICES WORLDWIDE\*

## Australia (AUS)

Siemens Ltd.  
885 Mountain Highway  
**Bayswater, Victoria 3153**  
☎ (+61) 3-97 21 21 11  
Fax (+61) 3-97 21 72 75

## Austria (A)

Infineon Technologies Villach AG  
Sales Office  
Austria AG  
Operngasse 20b/31  
**1040 Wien**  
☎ (+43) 1-5 87-70 70 0  
Fax (+43) 1-5 87-70 70 20

## Belgium/ Netherlands (B) (NL) (L)

Infineon Technologies Holding B.V.  
Sales Division  
Westblaak 32  
**3012 KM Rotterdam**  
☎ (+31) 10-2 17 68 00  
Fax (+31) 10-2 17 68 19

## Brazil (BR)

Infineon Technologies  
South America Ltda.  
Av. Mutinga, 3800 - prédio 3  
**05110-901 São Paulo-SP**  
☎ (+55) 11-39 08-25 64  
Fax (+55) 11-39 08-27 28

## Canada (CDN)

Infineon Technologies Corporation  
340 March Road, Suite 301  
**Kanada, Ontario K2K 2E2**  
☎ (+1) 613-5 91-38 35  
Fax (+1) 613-5 91-89 54

## China (CN)

Infineon Technologies  
International Trade (Shanghai) Co., Ltd.  
Beijing Representative Office  
12th Floor, Quantum Plaza  
No.27 Zhichun Road  
Haidian District,  
**Beijing 100083,  
People's Republic of China**  
☎ (+86) 10 82 35 61 18  
Fax (+86) 10 82 35 54 74

Infineon Technologies  
Hong Kong Ltd.  
Hong Kong Office  
302 Level 3 Festival Walk  
80 Tat Chee Avenue  
Kowloon Tong  
**Hong Kong**  
☎ (+8 52) 28 32 05 00  
Fax (+8 52) 28 27 97 62

Infineon Technologies  
International Trade (Shanghai) Co., Ltd.  
No. 8, Lane 647, Songtao Road  
Zhangjiang Hi-Tech Park  
**Pudong, Shanghai, China**  
☎ (+86) 21-38 95 37 08  
Fax (+86) 21-50 80 62 04

## Germany (D)

Infineon Technologies AG  
Siemensstraße 31-33  
**71254 Ditzingen/Stuttgart**  
☎ (+49) 7 1 56-1 79 19-10  
Fax (+49) 7 1 56-1 79 19-90

## Germany (D)

Infineon Technologies AG  
Völklinger Straße 4  
**40219 Düsseldorf**  
☎ (+49) 2 11-20 95 49 0  
Fax (+49) 2 11-20 95 49 60

Infineon Technologies AG  
Naegelsbachstraße 26  
**91052 Erlangen**  
☎ (+49) 91 31-97 00 1-0  
Fax (+49) 91 31-97 00-99

Infineon Technologies AG  
Paderborner Straße 1  
**30539 Hannover**  
☎ (+49) 5 11-87 65 62 0  
Fax (+49) 5 11-87 65 62 90

Infineon Technologies AG  
Rosenheimer Straße 116  
**81669 München**  
☎ (+49) 89-23 40  
Fax (+49) 89-23 42 46 94

Infineon Technologies AG  
Memory Products Sales  
Gustav-Heinemann-Ring 212  
**81739 München**  
☎ (+49) 89-23 42 38 01  
Fax (+49) 89-23 42 04 90  
Infineon Technologies AG

Stüdwedpark 65  
**90449 Nürnberg**  
☎ (+49) 9 11-2 52 93 0  
Fax (+49) 9 11-2 52 93 93

## Denmark (DK)

Infineon Technologies Nordic A/S  
Herlev Hovedgade 201A  
**DK 2730 Herlev**  
☎ (+45) 44 50 77 00  
Fax (+45) 44 50 77 01

## Finland (FIN)

Infineon Technologies Nordic OY  
Visitor's Address Linnouitustie 4A  
P.O. Box 276  
**FIN-02601 Espoo**  
☎ (+3 58) 10-680 84 00  
Fax (+3 58) 10-680 84 01

## France (F)

Infineon Technologies France SAS  
39 - 47, Bd. Ornano  
**93527 Saint-Denis CEDEX 2**  
☎ (+33) 1-48 09 72 00  
Fax (+33) 1-48 09 72 90

## India (IND)

Infineon Technologies  
India Pvt. Ltd.  
10th Floor, Discoverer Building  
International Technology Park  
Whitefield Road  
**Bangalore 560 066, India**  
☎ (+91) 80 8 41 00-17/18  
Fax (+91) 80 8 41 00 12

## Ireland (IRL)

Infineon Technologies Ireland Ltd.  
69 Fitzwilliam Lane  
**Dublin 2**  
☎ (+35) 31-79 99 500  
Fax (+35) 31-79 99 501

## Israel (IL)

Nisko Ltd.  
2 A, Habarzel Street  
**Tel Aviv 69710**  
☎ (+9 72) 3-7 65 73 00  
Fax (+9 72) 3-7 65 73 33

## Italy (I)

Infineon Technologies Italia S.r.l.  
Via Vipiteno, 4  
**20128 Milano**  
☎ (+39) 022 52 04-1  
Fax (+39) 022 52 04-43 95

## Japan (J)

Infineon Technologies Japan K.K.  
Takanawa Park Tower 8F/9F/12F/17F  
3-20-14, Higashi-Gotanda,  
Shinagawa-ku,  
**Tokyo 141-0022**  
☎ (+81) 3 54 49 64 11  
Fax (+81) 3 54 49 64 01

## Korea (ROK)

Infineon Technologies Korea Co., Ltd.  
Room No. 2 & 3, 9th floor  
Daelim Acrotel Building  
467-6 Dokok-Dong, Kangnam-Gu  
**Seoul, Korea 135-971**  
☎ (+82) 23 46 00-900  
Fax (+82) 23 46 00-901/902

## Malaysia (MAL)

Infineon Technologies (M) SDN BHD  
Krystal Point II  
1-4-11/12, Lebuh Bukit Kecil 6  
11900 Bayan Lepas  
**Penang, Malaysia**  
☎ (+60) 46 44 77 66  
Fax (+60) 46 41 48 72

## New Zealand (NZ)

Siemens Components  
300 Great South Road  
**Greenland, Auckland**  
☎ (+64) 95 20 30 33  
Fax (+64) 95 20 15 56

## Poland (PL)

Siemens SP z.o.o.  
ul. Zupnicza 11  
**03-821 Warszawa**  
☎ (+48) 22-8 70 91 50  
Fax (+48) 22-8 70 91 59

## Portugal (P)

Siemens S.A.  
OG Componentes Electronicos  
Rua Irmaos Siemens, 1  
Alfragide  
**2720-093 Amadora**  
☎ (+3 51) 21-4 17 85 90  
Fax (+3 51) 21-4 17 80 83

## Russia (RUS)

INTECH electronics  
ul. Smolnaja 24 a / 1203  
**125 445 Moscow**  
☎ (+70) 95-4 51 97 37  
Fax (+70) 95-4 51 86 08

## Singapore (SGP)

Infineon Technologies Asia  
Pacific Pte. Ltd.  
25 New Industrial Road  
KHL Building  
**Singapore 536 211**  
☎ (+65) 68 40 07 32  
Fax (+65) 68 40 00 77

## South Africa (ZA)

Siemens Components  
P.O. Box 3438  
Halfway House 1685  
**Gauteng**  
☎ (+27) 11 652-20 00  
Fax (+27) 11 652-25 73

## Spain (E)

Siemens S.A.  
División Componentes  
Ronda de Europa, 5  
**28760 Tres Cantos-Madrid**  
☎ (+34) 91-5 14 71 54  
Fax (+34) 91-5 14 70 13

## Sweden (S)

Infineon Technologies Nordic AB  
P.O. Box 46  
**164 93 Kista**  
☎ (+46) 8-7 03 59 00  
Fax (+46) 8-7 03 59 01

## Switzerland (CH)

Infineon Technologies  
Switzerland AG  
Badenerstraße 623  
P.O. Box 1570  
**8048 Zürich**  
☎ (+41) 1-4 97 80 40  
Fax (+41) 1-4 97 80 50

## Taiwan (RC)

Infineon Technologies  
Taiwan Ltd.  
12F-1, No. 3-2 Yuan Qu Street  
Nan Kang Software Park  
**Twain 115, R.O.C.**  
☎ (+8 86) 2-26 55 75 00  
Fax (+8 86) 2-26 55 75 01-8

## Turkey (TR)

Siemens Sanayi ve Ticaret A.S.  
Yakacik Yolu No: 111  
**34861 Kartal, Istanbul**  
☎ (+90) 21 64 59 28 51  
Fax (+90) 21 64 19 31 90

## United Kingdom (GB)

Infineon Technologies UK Ltd.  
Infineon House  
Fleet Mill  
Minley Road  
**Fleet, Hampshire GU51 2RD**  
☎ (+44) 12 52-77 22 00  
Fax (+44) 12 52-77 22 01

## U.S.A. (USA)

Infineon Technologies  
North America Corp.  
3700 West Parmer Lane, Suite 102  
**Austin, TX 78727**  
☎ (+1) 51 23 41-71 27  
Fax (+1) 51 23 41-99 26

## U.S.A. (USA)

Infineon Technologies  
North America Corp.  
8203 Willow Place South, Suite 660  
**Houston, TX 77070**  
☎ (+1) 28 17 74-05 55  
Fax (+1) 28 17 74-05 61

Infineon Technologies  
North America Corp.  
2529 Commerce Drive  
**Kokomo, IN 46902**  
☎ (+1) 7 65-4 56 19 28  
Fax (+1) 7 65-4 56 38 36

Infineon Technologies  
North America Corp.  
21800 Haggerty Road, Suite 112  
**Northville, MI 48167**  
☎ (+1) 2 48-3 74 08 90  
Fax (+1) 2 48-3 74 25 01

Infineon Technologies  
North America Corp.  
3000 CentreGreen Way  
**Raleigh, NC 27513**  
☎ (+1) 91 96 77-27 00  
Fax (+1) 91 96 78 19 34

Infineon Technologies  
North America Corp.  
6170 Cornerstone Ct East, Suite 240  
**San Diego, CA 92121**  
☎ (+1) 85 85 26-22 01  
Fax (+1) 85 85 26-22 02

Infineon Technologies Corporation  
1730 North First Street  
**San Jose, CA 95112**  
☎ (+1) 4 08-5 01 60 00  
Fax (+1) 4 08-5 01 24 24

Infineon Technologies  
North America Corp.  
1901 N. Roselle Rd., Suite 1020  
**Schaumburg, IL 60195**  
☎ (+1) 84 78 84-70 09  
Fax (+1) 84 78 84-75 99

\* and representative offices