


SILICON DETECTOR DIODE

DESCRIPTION:

The **MA40232-119** is a Zero Bias Silicon Schottky Barrier Detector Diode.

MAXIMUM RATINGS

P_{DISS}	200 mW @ $T_C = 25^\circ C$
T_J	$-65^\circ C$ to $+150^\circ C$
T_{STG}	$-65^\circ C$ to $+175^\circ C$

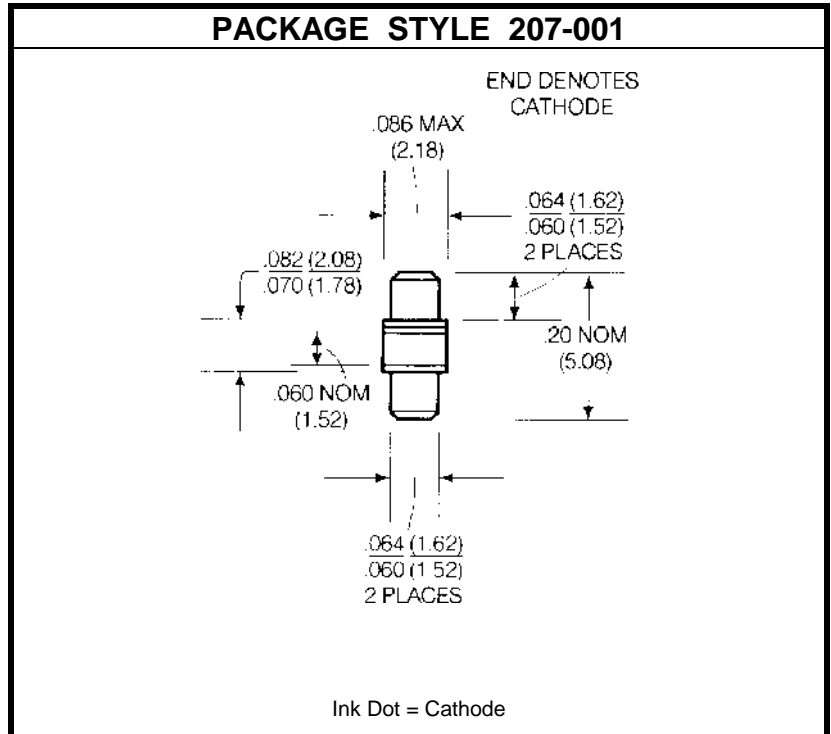

CHARACTERISTICS $T_C = 25^\circ C$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
E_o	VOLTAGE OUTPUT (NOTE 2)	15.0			mV
Z_v	VIDEO IMPEDANCE	5.0		15.0	K Ω
T_{SS}	TANGENTIAL SIGNAL SENSITIVITY NOTES (1 & 2)	-56			dBm