


**Features**

- Bi-color LED lamp
- White diffused lens
- Low current requirements
- Reliable and rugged
- IC Compatible

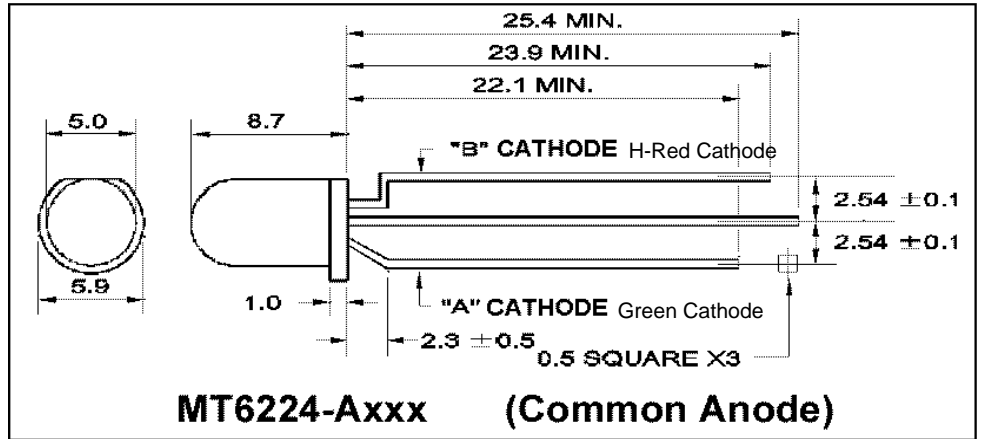

**Series Line-Up**

Part Number	Color	Material
MT6224-AHRG	Yellow Green	GaP
	High Efficiency Red	GaAsP

**Maximum Ratings (Ta=25°C)**

Part Number	Forward Current I <sub>F</sub>	Reverse Voltage V <sub>R</sub>	Power Dissipation P <sub>D</sub>	Operating Temperature T <sub>opr</sub>	Storage Temperature T <sub>stg</sub>
MT6224-AHRG	30	5	85.00	-25 ~ +85	-25 ~ +100
	30	5	85.00	-25 ~ +85	-25 ~ +100
<b>Unit</b>	<b>mA</b>	<b>V</b>	<b>mW</b>	<b>°C</b>	<b>°C</b>

**Company Headquarters**  
3 Northway Lane North  
Latham, New York 12110  
Toll free: 1.800.984.5337  
Fax: 518.785.4725

## Electrical and Optical Characteristics (Ta=25°C)

Part Number	PWL nm λP	Material	View Angle 2θ <sub>1/2</sub>	Luminous Intensity I <sub>v</sub>				Forward Voltage V <sub>F</sub>				Rev Current I <sub>R</sub>	
				min.	typ.	max.	IF@	min.	typ.	max.	IF@	max.	VR@
MT6224-AHRG	567	GaP	70°	-	35.00	-	20mA	-	2.10	3.00	20mA	100	5V
	635	GaAsP	70°	-	30.00	-	20mA	-	2.10	3.00	20mA	100	5V
-	nm	-	deg	mcd				-	V		-	μ A	-

### NOTES:

- All Dimensions are in millimeters.
- Tolerance is ±0.25mm unless otherwise stated.
- An Epoxy Meniscus may extend about 1mm down the leads.
- Burr around bottom of epoxy may be around 0.5mm MAX.
- Specifications are subject to change without notice.

### Company Headquarters

3 Northway Lane North  
Latham, New York 12110  
Toll free: 1.800.984.5337  
Fax: 518.785.4725

eb: www.marktechopto.com | Email: info@marktechopto.com

### West Coast Sales Office

950 South Coast Drive, Suite 225  
Costa Mesa, California 92626  
Toll Free: 800.984.5337  
Fax: 714.850.9314