


# 3×1.5 Surface Mount LED (Flat Lens)


## SEC1001 Series

### External Dimensions

(Unit: mm)

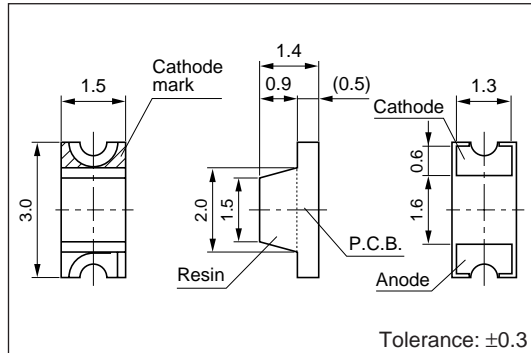

### Directivity (Typical)

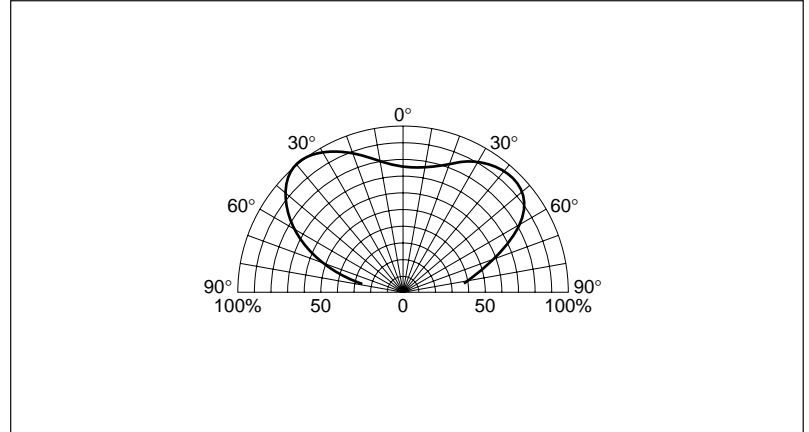

### Absolute maximum ratings (Ta=25°C)

Symbol	Unit	Rating		Condition
		GaP/GaAsP/GaAlAs	GaN/InGaN	
I <sub>F</sub>	mA	30		
ΔI <sub>F</sub>	mA/°C	-0.45		Above 25°C
I <sub>FP</sub>	mA	70		f=1kHz, tw≤100μs
V <sub>R</sub>	V	4	5	
Top	°C	-30 to +85	-25 to +80	
T <sub>stg</sub>	°C	-30 to +100		

### Electrical Optical characteristics (Ta=25°C)

Emitting color	Part Number	Lens color	Forward voltage			Reverse current		Intensity		Peak wavelength		Spectrum half width		Chip material
			V <sub>F</sub>		Condition	I <sub>R</sub>	Condition	I <sub>V</sub>	Condition	λ <sub>P</sub>	Condition	Δλ	Condition	
			typ	max										
Deep red	SEC1101C	Clear	2.0	2.5	10	100	4	1.5	20	700	10	100	10	GaP
High-intensity red	SEC1601C	Clear	1.7	2.2	10	100	4	100	20	660	10	30	10	GaAlAs
Red	SEC1201C	Clear	1.9	2.5	10	100	4	10	20	630	10	35	10	GaAsP
Amber	SEC1801C	Clear	1.9	2.5	10	100	4	16	20	610	10	35	10	
Orange	SEC1901C	Clear	1.9	2.5	10	100	4	13	20	587	10	33	10	GaP
Yellow	SEC1701C-YG	Clear	2.0	2.5	10	100	4	25	20	570	10	30	10	
Green	SEC1401C	Clear	2.0	2.5	10	100	4	22	20	560	10	20	10	
Deep green	SEC1401E-TG	Transparent green	2.0	2.5	10	100	4	11	20	558	10	20	10	
Pure green	SEC1501C	Clear	2.0	2.5	10	100	4	8.0	20	555	10	20	10	InGaN
Ultra-high-intensity pure green	SECU1D01C	Clear	3.3	4.0	20	10	5	150	20	525	20	35	20	
Ultra-high-intensity blue	SECU1E01C	Clear	3.3	4.0	20	10	5	50	20	470	20	35	20	
Blue	SEC1E01C	Clear	3.9	4.8	20	10	5	6.0	20	430	20	65	20	GaN