


5 ϕ Round Infrared LED (Direct Mount)


SID1050M Series

External Dimensions

(Unit: mm)

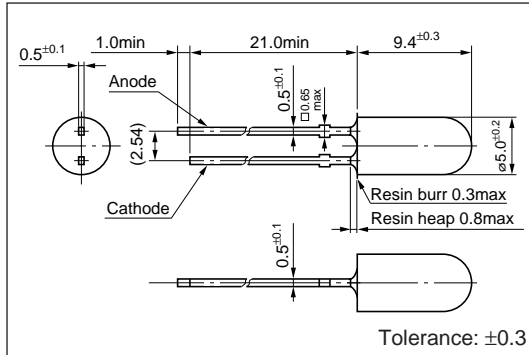

Directivity (Typical)

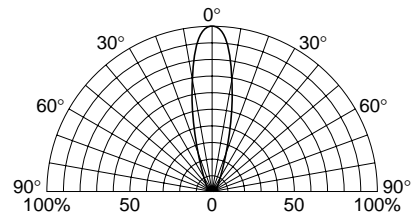

Absolute maximum ratings (Ta=25°C)

Symbol	Unit	Rating	Condition
I _F	mA	150	
ΔI _F	mA/°C	-1.33	Above 25°C
I _{FP}	mA	1000	f=1kHz, tw≤10μs
V _R	V	5	
Top	°C	-30 to +85	
Tstg	°C	-30 to +100	

Electrical Optical characteristics (Ta=25°C)

Part Number	Lens color	Forward voltage		Reverse current		Optical Power		Peak wavelength		Spectrum half width		Chip material	
		V _F (V)		I _R (μA)	Condition V _R (V)	I _e (mW/sr)	Condition	λ _P (nm)	Condition I _F (mA)	Δλ (nm)	Condition I _F (mA)		
		typ	max	max		typ		typ	typ	typ			
SID1050CM	Clear	1.3	1.5	50	10	5	250	(Constant voltage) V _{CC} =3V, R=2.2Ω	940	50	50	50	GaAs